


SPH - Tubo semplice parete alta pressione

SPH1: Una treccia metallica
SPH2: Due trecce metalliche

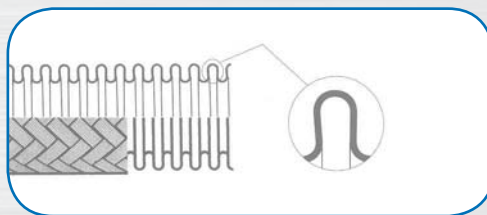

Diametro interno		Numero trecce (nr.)	Diametro esterno (mm)	Pressione (bar)		Raggio minimo di curvatura (mm)	
Inch	(mm)			Max Esercizio	Scoppio	Statico	Dinamico
1/4"	6	1	11.6	260	1040	25	140
		2	13	300	1200	45	180
3/8"	10	1	17.5	170	680	38	220
		2	19.1	250	1000	60	260
1/2"	12	1	20.3	125	500	45	250
		2	21.9	250	1000	70	300
5/8"	16	1	25.8	145	580	58	300
		2	27.8	225	900	90	360
3/4"	20	1	31.2	97	390	70	280
		2	33.2	145	900		
1"	25	1	36.2	62	250	85	320
		2	38.2	100	400		
1"1/4	32	1	45	65	260	105	380
		2	47.2	78	310		
1"1/2	40	1	57.3	38	150	130	420
		2	58.2	72	290		
2"	50	1	68.2	55	220	160	490
		2	71.3	77	310		
2"1/2	65	1	84.2	31	125	200	590
		2	87.3	36	245		
3"	80	1	101.5	30	120	240	700
		2	104.6	51	200		
4"	100	1	121	29	120	290	900
		2	124.6	47	190		
5"	125	1	149.2	17	70	600	1200
		2	152.4	33	130		

Le pressioni indicate in tabella sono riferite ad una temperatura pari a 20°C