


SPL - Tubo semplice parete bassa pressione

SPL0: Senza treccia metallica
SPL1: Una treccia metallica

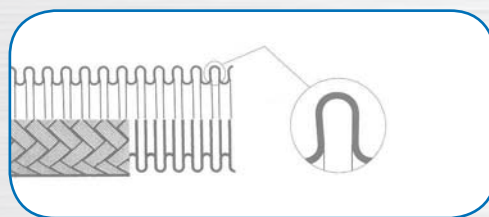

Diametro interno		Numero treccie (nr.)	Diametro esterno (mm)	Pressione (bar)		Raggio minimo di curvatura (mm)	
Inch	(mm)			Max Esercizio	Scoppio	Statico	Dinamico
1/4"	6	0	9.7	24	96	15	80
		1	10.8	125	500	25	
3/8"	10	0	14.3	12	48	18	130
		1	15.7	98	392	40	
1/2"	12	0	16.8	9	36	20	140
		1	18.2	73	292	45	
5/8"	16	0	21.7	7	28	28	160
		1	23.3	69	276	60	
3/4"	20	0	26.7	6	24	32	170
		1	28.3	44	174	70	
1"	25	0	32.2	3	12	40	190
		1	34.2	55	220	85	
1"1/4	32	0	41	2.5	10	41	260
		1	43	42	160	43	
1"1/2	40	0	49.7	2.5	10	60	300
		1	52	40	152	130	
2"	50	0	60.3	1.6	6.4	70	320
		1	62.6	28	104	160	
2"1/2	65	0	80	1	4	90	400
		1	83.2	24	96	200	
3"	80	0	98	1	4	110	700
		1	101.2	22	88	240	
4"	100	0	118	0.8	3.2	130	750
		1	121.2	19	76	290	
5"	125	0	145	0.6	2.4	500	1000
		1	148.2	16	64		
6"	150	0	171	0.5	2	700	1300
		1	174.8	12.5	50		
8"	200	0	227	0.25	1	860	1350
		1	232	10.5	42		

Le pressioni indicate in tabella sono riferite ad una temperatura pari a 20°C