



7313



714
Fed. Spec.:
GGG-P-480

Retaining Ring PLIERS

Internal and External

HORSESHOE LOCK RING PLIER

- For removing horseshoe lock rings used on hydraulic brakes, differentials, etc. Plier is 203mm long; max. spread: 23,8mm

No. 714 – Horseshoe lock ring plier. Wt., 0,2 kg.

No. 7313 – External snap ring plier easily removes snap rings used to retain bearings on shafts. Max. spread: 27mm.

RETAINING RING PLIER KITS

- Choose from four sets; internal ring, external ring and convertible pliers for either internal or external rings.

No. 7053K – Replaceable tip pliers kit. This versatile kit contains (1) internal and (1) external pliers with (8) tip sets. Two sets each: 0,9 mm dia. 90° bend, 1,2 mm dia. straight, 1,2 mm dia. 90° bend, 1,8mm dia. straight. Recommended for 6,4 –51 mm rings. Packaged in plastic storage case. Wt., 0,3 kg.

No. 15702 – Replaceable tip kit (only) for No. 7053K.

No. 7123K – Convertible pliers kit. Contains **No. 1120** (1mm dia./straight tip) and No. 1340 (1,8mm dia./straight tip). Each pliers “converts” to handle both internal and external rings. Packaged in a reusable plastic storage case. Wt., 0,4Kg.

No. 7125K – Convertible pliers kit. Contains **No. 1125** (1 mm dia./45° bent tip) and No. 1345 (1,8 mm dia./45° bent tip). Each pliers “converts” to handle both internal and external rings. Packaged in a reusable plastic storage case. Wt., 0,4kg.


No. 7406K – Professional pliers kit. Contains (6) retaining convertible pliers to handle both internal and external rings from 6,4–51 mm. Includes straight and 90° off-set pliers with 1, 1,2, and 1,8 mm tip diameters. Includes Nos. 1120, 1131, 1320, 1329, 1340 and 1349. Packaged in an impact resistant storage case. Wt., 0,9 kg.

REPLACEMENT TIPS FOR 7300 AND 7301 PLIERS

No. 209201 – Replacement tips (pr.) for the 7300 and 7301 pliers. Wt., 0.1 kg.



7053K
internal &
external
plier, 4
sizes of
tips.




7123K



7406K

RETAINING RING PLIERS SELECTION GUIDE

Plier No	Tip Bend	Tip Size Dia. (mm)	For Int'l Rings* Bore Dia. (mm)	For External Rings* Shaft Dia. (mm)
0100	Str.	1	9,5 - 26	--
0200	Str.	1	--	6,4 - 22
0300	Str.	1,8	27 - 44,5	--
0400	Str.	1,8	--	24 - 36,5
0500	Str.	2,3	46 - 89	--
0600	Str.	2,9	--	38 - 89
7300	Str.	3	78 - 152	--
7301	Str.	3	--	38 - 165
Convertible Pliers				
1120	Str.	1	9,5 - 14	6,4 - 17
1125	45°	1	9,5 - 14	6,4 - 17
1131	90°	1	9,5 - 14	6,4 - 17
1320	Str.	1,2	16 - 26	17 - 22
1329	90°	1,2	16- 26	17 - 22
1340	Str.	1,8	27 - 44,5	24 - 36,5
1345	45°	1,8	27 - 44,5	24 -36,5
1349	90°	1,8	27 - 44,5	24 - 36,5

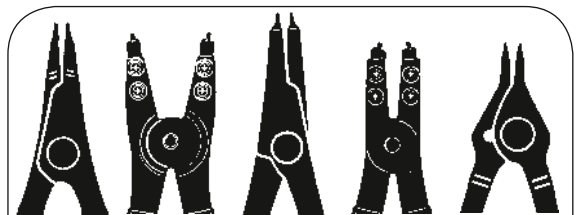

External	Internal	Convertible
No. 0200	No. 7301	No. 0100
No. 0400		No. 0300
No. 0600		No. 0500
		No. 7300
		No. 1120
		No. 1320
		No. 1340
		No. 1125*
		No. 1345*
		No. 1131**
		No. 1329**
		No. 1349**

Fed. Spec.: GGG-P-480-E

* 45° Angled Tips

** 90° Angled Tips

Always wear safety goggles when using pliers

*Capacities are shown for basic style rings.

3700.1 7791077746:W