


// A55051 - FEMMINA 90° BSPP SV. 60° CON O'RING - DKOR 90

// 90° BSPP FEMALE 60° CONE WITH O'RING - DKOR 90

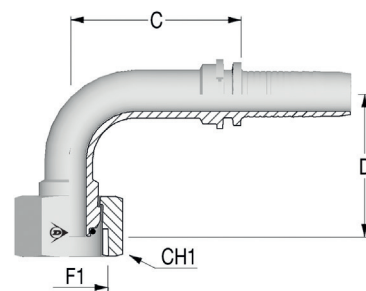

Code	Nut Type	ID			F1	F1	C	D Drop	CH1
		Dash	mm	In	Dash Size		mm	mm	mm
A55051-02-03	CR	03	5,0	3/16"	02	1/8-28	24,0	30,0	14,0
A55051-02-04	CR	04	6,0	1/4"	02	1/8-28	30,5	32,0	14,0
A55051-04-04	SN	04	6,0	1/4"	04	1/4-19	29,3	29,0	19,0
A55051-06-04	SN	04	6,0	1/4"	06	3/8-19	29,8	31,0	22,0
A55051-06-05	SN	05	8,0	5/16"	06	3/8-19	33,2	36,0	22,0
A55051-06-06	SN	06	10,0	3/8"	06	3/8-19	34,8	42,0	22,0
A55051-08-06	SN	06	10,0	3/8"	08	1/2-14	34,3	35,5	27,0
A55051-06-08	CR	08	13,0	1/2"	06	3/8-19	35,3	43,0	22,0
A55051-08-08	SN	08	13,0	1/2"	08	1/2-14	35,8	41,0	27,0
A55051-10-08	SN	08	13,0	1/2"	10	5/8-14	41,6	43,5	27,0
A55051-12-08	SN	08	13,0	1/2"	12	3/4-14	41,8	43,0	32,0
A55051-10-10	CR	10	16,0	5/8"	10	5/8-14	47,9	47,0	27,0
A55051-12-10	SN	10	16,0	5/8"	12	3/4-14	51,9	49,0	32,0
A55051-12-12	CR	12	19,0	3/4"	12	3/4-14	49,1	53,0	32,0
A55051-16-12	SN	12	19,0	3/4"	16	1-11	54,1	60,5	38,0
A55051-16-16	CR	16	25,0	1"	16	1-11	75,1	69,0	38,0
A55051-20-16	SN	16	25,0	1"	20	1 1/4-11	75,1	88,5	50,0
A55051-20-20	TN	20	32,0	1 1/4"	20	1 1/4-11	82,3	83,0	50,0
A55051-24-20	SN	20	32,0	1 1/4"	24	1 1/2-11	101,0	83,0	55,0
A55051-24-24	TN	24	38,0	1 1/2"	24	1 1/2-11	95,7	96,0	55,0
A55051-32-24	SN	24	38,0	1 1/2"	32	2-11	107,8	104,0	70,0
A55051-32-32	TN	32	51,0	2"	32	2-11	128,5	136,0	70,0