


**// A55A51 - FEMMINA 45° METRICA SV. 24° CON O'RING DIN 3865 SERIE
LEGGERA - DKOL 45**
// 45° METRIC FEMALE 24° CONE WITH O'RING - LIGHT - DIN 3865 - DKOL 45

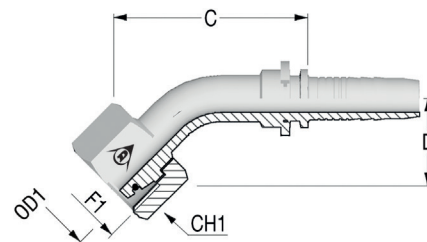

Code	Nut Type	ID			F1	OD1	C	D Drop	CH1
		Dash	mm	In		mm	mm	mm	mm
A55A51-03-03	SN	03	5,0	3/16"	M12X1.5	6	44,9	19,0	14,0
A55A51-03-04	CR	04	6,0	1/4"	M12X1.5	6	45,2	15,5	14,0
A55A51-04-04	SN	04	6,0	1/4"	M14X1.5	8	43,0	17,5	17,0
A55A51-05-04	SN	04	6,0	1/4"	M16X1.5	10	42,0	20,0	19,0
A55A51-04-05	SN	05	8,0	5/16"	M14X1.5	8	47,5	20,0	17,0
A55A51-05-05	SN	05	8,0	5/16"	M16X1.5	10	47,5	20,0	19,0
A55A51-06-05	SN	05	8,0	5/16"	M18X1.5	12	47,0	22,0	22,0
A55A51-05-06	TN	06	10,0	3/8"	M16X1.5	10	43,0	19,0	19,0
A55A51-06-06	SN	06	10,0	3/8"	M18X1.5	12	46,8	19,5	22,0
A55A51-06-08	TN	08	13,0	1/2"	M18X1.5	12	52,0	23,0	22,0
A55A51-08-08	SN	08	13,0	1/2"	M22X1.5	15	55,0	21,0	27,0
A55A51-10-10	SN	10	16,0	5/8"	M26X1.5	18	65,3	24,0	32,0
A55A51-10-12	TN	12	19,0	3/4"	M26X1.5	20	77,0	34,0	32,0
A55A51-12-12	SN	12	19,0	3/4"	M30X2	22	69,4	32,0	36,0
A55A51-12-16	TN	16	25,0	1"	M30X2	22	71,1	29,0	36,0
A55A51-16-16	SN	16	25,0	1"	M36X2	28	91,4	32,0	41,0
A55A51-20-20	SN	20	32,0	1 1/4"	M45X2	35	100,0	45,0	50,0
A55A51-24-24	SN	24	38,0	1 1/2"	M52X2	42	114,1	47,0	60,0