


**// A55A56 - FEMMINA 45° METRICA SV. 24° CON O'RING DIN 3865 SERIE PESANTE - DKOS 45**  
**// 45° METRIC FEMALE 24° CONE WITH O'RING - HEAVY - DIN 3865 - DKOS 45**

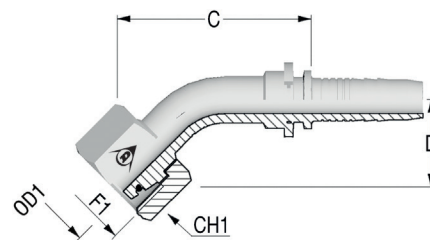

Code	Nut Type	ID			F1	OD1	C	D Drop	CH1
		Dash	mm	In		mm	mm	mm	mm
A55A56-03-04	SN	04	6,0	1/4"	M16X1.5	8	48,6	16,0	19,0
A55A56-04-04	SN	04	6,0	1/4"	M18X1.5	10	43,5	19,0	22,0
A55A56-05-05	SN	05	8,0	5/16"	M20X1.5	12	48,1	21,0	24,0
A55A56-05-06	SN	06	10,0	3/8"	M20X1.5	12	50,6	20,0	24,0
A55A56-06-06	SN	06	10,0	3/8"	M22X1.5	14	52,9	21,0	27,0
A55A56-05-08	TN	08	13,0	1/2"	M20X1.5	12	54,0	24,0	24,0
A55A56-08-08	SN	08	13,0	1/2"	M24X1.5	16	55,8	21,5	30,0
A55A56-10-10	SN	10	16,0	5/8"	M30X2	20	66,3	30,0	36,0
A55A56-10-12	SN	12	19,0	3/4"	M30X2	20	66,1	29,0	36,0
A55A56-12-12	SN	12	19,0	3/4"	M36X2	25	69,5	33,0	46,0
A55A56-12-16	SN	16	25,0	1"	M36X2	25	89,7	36,0	46,0
A55A56-16-16	SN	16	25,0	1"	M42X2	30	110,3	40,5	50,0
A55A56-20-20	SN	20	32,0	1 1/4"	M52X2	38	109,0	45,0	60,0