


// A55A57 - FEMMINA 90° METRICA SV. 24° CON O'RING DIN 3865 SERIE PESANTE - DKOS 90

// 90° METRIC FEMALE 24° CONE WITH O'RING - HEAVY - DIN 3865 - DKOS 90

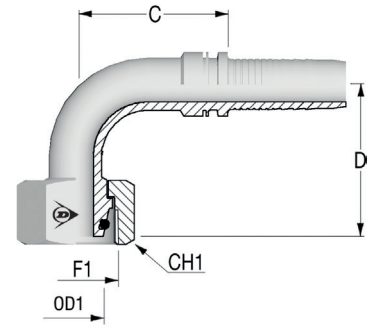

Code	Nut Type	ID			F1	OD	C	D Drop	CH1
		Dash	mm	In					
A55A57-03-04	SN	04	6,0	1/4"	M16X1.5	8	27,3	33,0	19,0
A55A57-04-04	SN	04	6,0	1/4"	M18X1.5	10	26,8	34,0	22,0
A55A57-04-05	SN	05	8,0	5/16"	M18X1.5	10	33,2	39,0	22,0
A55A57-05-05	SN	05	8,0	5/16"	M20X1.5	12	33,2	39,0	24,0
A55A57-05-06	TN	06	10,0	3/8"	M16X1.5	8	33,0	38,0	19,0
A55A57-04-06	TN	06	10,0	3/8"	M18X1.5	10	35,0	38,0	22,0
A55A57-05-06	SN	06	10,0	3/8"	M20X1.5	12	34,3	38,5	24,0
A55A57-06-06	SN	06	10,0	3/8"	M22X1.5	14	34,3	40,5	27,0
A55A57-05-08	TN	08	13,0	1/2"	M20X1.5	12	40,0	45,0	24,0
A55A57-08-08	SN	08	13,0	1/2"	M24X1.5	16	39,8	41,5	30,0
A55A57-10-08	SN	08	13,0	1/2"	M30X2	20	45,8	50,0	36,0
A55A57-08-10	TN	10	16,0	5/8"	M24X1.5	16	52,0	56,0	30,0
A55A57-10-10	SN	10	16,0	5/8"	M30X2	20	47,9	55,0	36,0
A55A57-10-12	SN	12	19,0	3/4"	M30X2	20	50,6	58,0	36,0
A55A57-12-12	SN	12	19,0	3/4"	M36X2	25	50,6	59,5	46,0
A55A57-12-16	SN	16	25,0	1"	M36X2	25	77,6	73,5	46,0
A55A57-16-16	SN	16	25,0	1"	M42X2	30	75,6	79,0	50,0
A55A57-16-20	TN	20	32,0	1 1/4"	M42X2	30	94,0	92,0	50,0
A55A57-20-20	SN	20	32,0	1 1/4"	M52X2	38	94,0	92,0	60,0