


// 500R FIRESAFE 5000

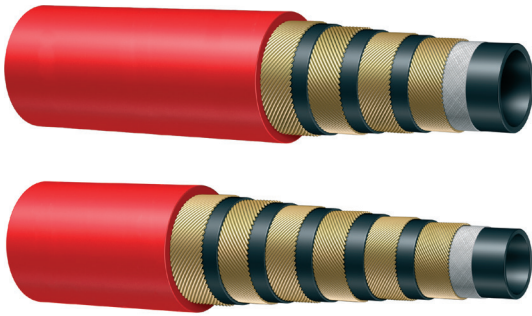

// BOP - API 16-D FLAME RESISTANCE

Tubo: gomma sintetica resistente agli oli.

Rinforzo: quattro/sei spirali in acciaio ad alta resistenza.

Copertura: gomma sintetica rossa resistente all'olio e al fuoco.

Applicazioni: sistemi idraulici ad alta pressione, dove è richiesto un funzionamento più duraturo rispetto ai tubi standard in caso di incendio.

Esercizio costante: -40 °C +121 °C

Lunghezza: random fino a 1" - 61 m max sopra 1 1/4"

APPROVATO MSHA - LLOYD'S sui tubi assemblati.

Tube: oil resistant synthetic rubber.

Reinforcement: four/six high tensile steel spirals.

Cover: oil and fire resistant red synthetic rubber.

Applications: high pressure hydraulic lines in blow out preventer system, where continuous operation in case of fire is required.

Constant operation: -40 °C +121 °C (-40 °F +250 °F)

Length: random up to 1" - 61 m max over 1 1/4"

MSHA APPROVED - LLOYD'S type approval on hose assemblies

Code													
	Dash	mm	In	mm	In	Mpa	psi	Mpa	psi	mm	In	Kg/m	lb/ft
DUNLOP 500R-04	04	6,0	1/4	25,30	1,00	35,0	5000	140,0	20000	150,0	5,91	0,710	0,48
DUNLOP 500R-06	06	10,0	3/8	28,10	1,11	35,0	5000	140,0	20000	180,0	7,09	1,134	0,77
DUNLOP 500R-08	08	13,0	1/2	31,00	1,22	35,0	5000	140,0	20000	230,0	9,06	1,280	0,87
DUNLOP 500R-12	12	19,0	3/4	38,80	1,53	35,0	5000	140,0	20000	300,0	11,81	1,860	1,26
DUNLOP 500R-16	16	25,0	1	46,00	1,81	35,0	5000	140,0	20000	340,0	13,39	2,690	1,81
DUNLOP 500R-20	20	32,0	1 1/4	53,10	2,09	35,0	5000	140,0	20000	460,0	18,11	3,340	2,25
DUNLOP 500R-24	24	38,0	1 1/2	64,90	2,56	35,0	5000	140,0	20000	560,0	22,05	5,870	3,95
DUNLOP 500R-32	32	51,0	2	78,70	3,10	35,0	5000	140,0	20000	700,0	27,56	7,780	5,23