



// NEW POWERTRAK - INSERTI FLANGE SAE SAE FLANGES

// 290250 - FLANGIA SAE 3000 PSI J518 CODE 61 - SFL
 // FLANGE SAE 3000 PSI J518 CODE 61 - SFL

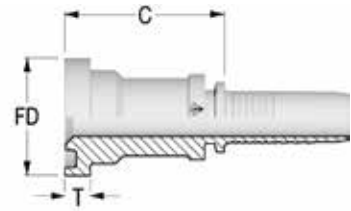


Code	ID			Flange	Flange Size	FD	T	C	WP
	Dash	mm	In	Dash Size		mm	mm	mm	psi
290250-12-12	12	19,0	3/4"	12	3/4	38,1	6,5	43,5	5000
290250-16-12	12	19,0	3/4"	16	1	44,5	8,0	53,5	5000
290250-16-16	16	25,0	1"	16	1	44,5	8,0	53,5	5000
290250-20-16	16	25,0	1"	20	1 1/4	50,8	8,0	56,0	5000
290250-16-20	20	32,0	1 1/4"	16	1	44,4	8,0	58,5	5000
290250-20-20	20	32,0	1 1/4"	20	1 1/4	50,8	8,0	58,5	5000
290250-24-20	20	32,0	1 1/4"	24	1 1/2	60,3	8,0	61,5	5000
290250-20-24	24	38,0	1 1/2"	20	1 1/4	50,8	8,0	55,5	5000
290250-24-24	24	38,0	1 1/2"	24	1 1/2	60,3	8,0	63,5	5000
290250-32-24	24	38,0	1 1/2"	32	2	71,4	9,5	75,0	5000
290250-32-32	32	50,0	2"	32	2	71,4	9,5	85,0	5000

// 29B370 - FLANGIA 45° SAE 3000 PSI J518 CODE 61 - SFL 45
 // 45° FLANGE SAE 3000 PSI J518 CODE 61 - SFL 45

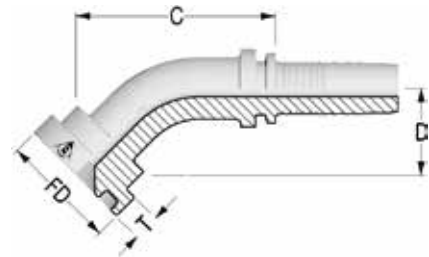


Code	ID			Flange	Flange Size	FD	T	C	D Drop	WP
	Dash	mm	In	Dash Size		mm	mm	mm	mm	psi
29B370-20-16	16	25,0	1"	20	1 1/4	50,8	8,0	88,9	32,5	5000
29B370-20-20	20	32,0	1 1/4"	20	1 1/4	50,8	8,0	94,3	38,5	5000
29B370-24-24	24	38,0	1 1/2"	24	1 1/2	60,3	8,0	99,8	43,0	5000
29B370-32-32	32	50,0	2"	32	2	71,4	9,5	154,0	54,0	5000

// 29B380 - FLANGIA 90° SAE 3000 PSI J518 CODE 61 - SFL 90
// 90° FLANGE SAE 3000 PSI J518 CODE 61 - SFL 90

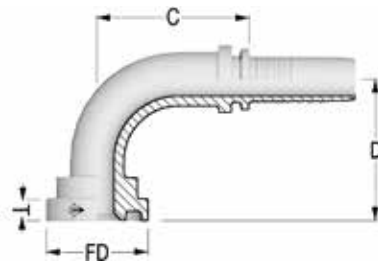


Code	ID			Flange	Flange Size	FD	T	C	D Drop	WP
	Dash	mm	In	Dash Size		mm	mm	mm	mm	psi
29B380-16-16	16	25,0	1"	16	1	44,5	9,5	78,1	64,0	5000
29B380-20-16	16	25,0	1"	20	1 1/4	50,8	10,5	74,7	69,0	5000
29B380-20-20	20	32,0	1 1/4"	20	1 1/4	50,8	10,5	92,0	81,0	5000
29B380-24-20	20	32,0	1 1/4"	24	1 1/2	60,3	12,5	87,0	85,0	5000
29B380-24-24	24	38,0	1 1/2"	24	1 1/2	60,3	12,5	103,0	93,0	5000
29B380-32-24	24	38,0	1 1/2"	32	2	71,4	12,5	137,8	97,0	5000
29B380-32-32	32	50,0	2"	32	2	71,4	12,5	139,0	130,0	5000

// 29B810 - FLANGIA SAE 6000 PSI J518 CODE 62 - SFS
// FLANGE SAE 6000 PSI J518 CODE 62 - SFS

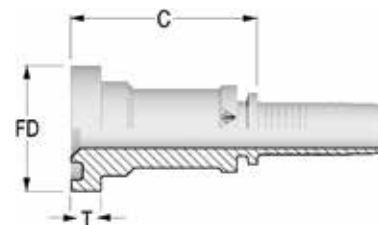


Code	ID			Flange	Flange Size	FD	T	C	WP
	Dash	mm	In	Dash Size		mm	mm	mm	psi
29B810-12-12	12	19,0	3/4"	12	3/4	41,3	9,0	53,5	6000
29B810-16-12	12	19,0	3/4"	16	1	47,6	9,5	56,5	6000
29B810-12-16	16	25,0	1"	12	3/4	41,3	9,0	58,5	6000
29B810-16-16	16	25,0	1"	16	1	47,6	9,5	58,5	6000
29B810-20-16	16	25,0	1"	20	1 1/4	54,0	10,5	65,5	6000
29B810-16-20	20	32,0	1 1/4"	16	1	47,6	9,5	61,0	6000
29B810-20-20	20	32,0	1 1/4"	20	1 1/4	54,0	10,5	64,0	6000
29B810-24-20	20	32,0	1 1/4"	24	1 1/2	63,5	12,5	74,0	6000
29B810-20-24	24	38,0	1 1/2"	20	1 1/4	54,0	10,5	71,0	6000
29B810-24-24	24	38,0	1 1/2"	24	1 1/2	63,5	12,5	76,0	6000
29B810-32-24	24	38,0	1 1/2"	32	2	79,4	12,5	88,0	6000
29B810-24-32	32	51,0	2"	24	1 1/2	63,5	12,5	86,0	6000
29B810-32-32	32	50,0	2"	32	2	79,4	12,5	103,0	6000

// 29B470 - FLANGIA 45° SAE 6000 PSI J518 CODE 62 - SFS 45
// 45° FLANGE SAE 6000 PSI J518 CODE 62 - SFS 45

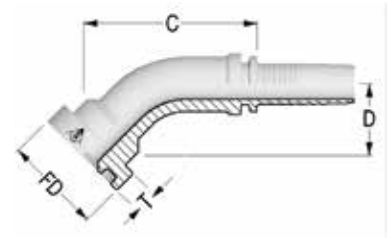

Code	ID			Flange Dash Size	Flange Size	FD mm	T mm	C mm	D Drop mm	WP psi
	Dash	mm	In							
29B470-12-12	12	19,0	3/4"	12	3/4	41,3	9,0	62,8	30,0	6000
29B470-16-12	12	19,0	3/4"	16	1	47,6	9,5	65,4	33,0	6000
29B470-12-16	16	25,0	1"	12	3/4	41,3	9,0	77,0	29,5	6000
29B470-16-16	16	25,0	1"	16	1	47,6	9,5	82,9	38,5	6000
29B470-20-16	16	25,0	1"	20	1 1/4	54,0	10,5	78,0	44,0	6000
29B470-16-20	20	32,0	1 1/4"	16	1	47,6	9,5	104,7	34,5	6000
29B470-20-20	20	32,0	1 1/4"	20	1 1/4	54,0	10,5	103,0	41,0	6000
29B470-24-20	20	32,0	1 1/4"	24	1 1/2	63,5	12,5	117,0	48,0	6000
29B470-24-24	24	38,0	1 1/2"	24	1 1/2	63,5	12,5	122,5	48,0	6000
29B470-32-24	24	38,0	2"	32	2	79,4	12,5	109,6	55,0	6000
29B470-32-32	32	50,0	2"	32	2	79,4	12,5	177,0	61,0	6000

// 29B480 - FLANGIA 90° SAE 6000 PSI J518 CODE 62 - SFS 90
// 90° FLANGE SAE 6000 PSI J518 CODE 62 - SFS 90

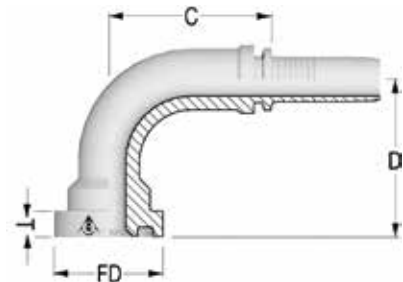

Code	ID			Flange Dash Size	Flange Size	FD mm	T mm	C mm	D Drop mm	WP psi
	Dash	mm	In							
29B480-12-12	12	19,0	3/4"	12	3/4	41,3	9,0	64,7	64,0	6000
29B480-16-12	12	19,0	3/4"	16	1	47,6	9,5	64,7	66,0	6000
29B480-12-16	16	25,0	1"	12	3/4	41,3	9,0	74,7	61,0	6000
29B480-16-16	16	25,0	1"	16	1	47,6	9,5	74,8	74,0	6000
29B480-20-16	16	25,0	1"	20	1 1/4	54,0	10,5	78,8	85,0	6000
29B480-16-20	20	32,0	1 1/4"	16	1	47,6	9,5	87,0	72,0	6000
29B480-20-20	20	32,0	1 1/4"	20	1 1/4	54,0	10,5	96,0	91,0	6000
29B480-24-20	20	32,0	1 1/4"	24	1 1/2	63,5	12,5	99,0	103,5	6000
29B480-24-24	24	38,0	1 1/2"	24	1 1/2	63,5	12,5	113,8	109,0	6000
29B480-32-24	24	38,0	2"	32	2	79,4	12,5	118,4	121,5	6000
29B480-32-32	32	50,0	2"	32	2	79,4	12,5	172,0	131,0	6000