


// NEW POWERTRAK - INSERTI METRICI DIN DIN METRIC INSERTS

// 291700 - MASCHIO METRICO SV. 24° DIN 3853 - SERIE PESANTE - CES


// METRIC MALE 24° SEAT - HEAVY - DIN 3853 - CES

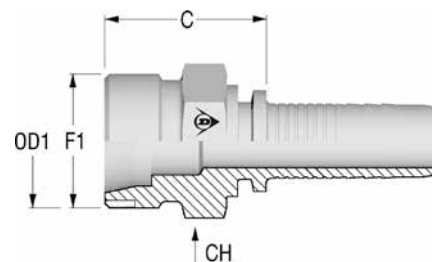

Code	Nut Type	ID			F1	OD1	C	CH
		Dash	mm	In		mm	mm	mm
291700-12-12	NA	12	19,0	3/4"	M36X2	25	36,5	36,0
291700-16-16	NA	16	25,0	1"	M42X2	30	36,2	46,0
291700-20-20	NA	20	32,0	1 1/4"	M52X2	38	51,0	55,0


// A29179 - FEMMINA METRICA SV. 24° CON O'RING DIN 3865 - SERIE PESANTE - DKOS

// METRIC FEMALE 24° CONE WITH O'RING - HEAVY - DIN 3865 - DKOS

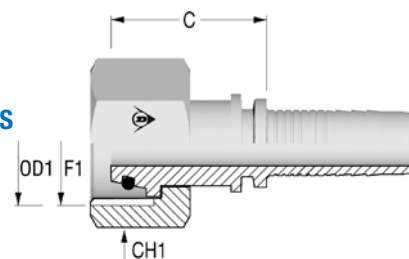


Code	Nut Type	ID			F1	OD1	C	CH1
		Dash	mm	In		mm	mm	mm
A29179-10-12	TN	12	19,0	3/4"	M30X2	20	36,8	36,0
A29179-12-12	SN	12	19,0	3/4"	M36X2	25	41,1	46,0
A29179-12-16	TN	16	25,0	1"	M36X2	25	46,0	46,0
A29179-16-16	SN	16	25,0	1"	M42X2	30	45,2	50,0
A29179-16-20	TN	20	32,0	1 1/4"	M42X2	30	51,0	50,0
A29179-20-20	SN	20	32,0	1 1/4"	M52X2	38	51,1	60,0
A29179-20-24	TN	24	38,0	1 1/2"	M52X2	38	58,0	60,0

// A29987 - FEMMINA 45° METRICA SV. 24° CON O'RING DIN 3865 - SERIE PESANTE - DKOS 45
// 45° METRIC FEMALE 24° CONE WITH O'RING - HEAVY - DIN 3865 - DKOS 45

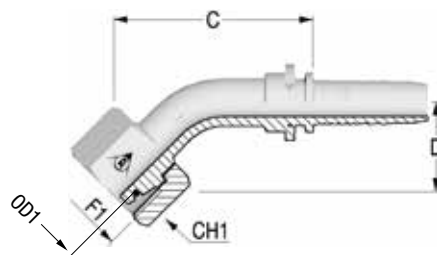

Code	Nut Type	ID			F1	OD1	C	D Drop	CH1
		Dash	mm	In		mm	mm	mm	mm
A29987-12-12	SN	12	19,0	3/4"	M36X2	25	70,4	33,0	46,0
A29987-12-16	TN	16	25,0	1"	M36X2	25	93,0	37,5	46,0
A29987-16-16	SN	16	25,0	1"	M42X2	30	109,5	35,5	50,0
A29987-20-20	SN	20	32,0	1 1/4"	M52X2	38	112,0	45,0	60,0
A29987-20-24	TN	24	38,0	1 1/2"	M52X2	38	127,0	45,0	60,0

// A29977 - FEMMINA 90° METRICA SV. 24° CON O'RING DIN 3865 - SERIE PESANTE - DKOS 90
// 90° METRIC FEMALE 24° CONE WITH O'RING - HEAVY - DIN 3865 - DKOS 90

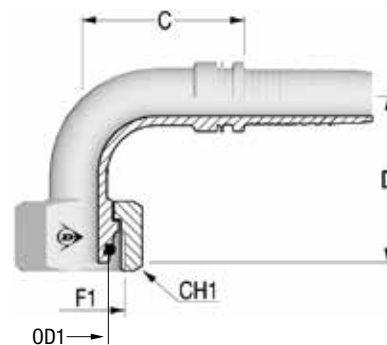

Code	Nut Type	ID			F1	OD1	C	D Drop	CH1
		Dash	mm	In		mm	mm	mm	mm
A29977-10-12	TN	12	19,0	3/4"	M30X2	20	65,5	67,5	36,0
A29977-12-12	SN	12	19,0	3/4"	M36X2	25	51,0	59,5	46,0
A29977-12-16	TN	16	25,0	1"	M36X2	25	75,6	82,0	46,0
A29977-16-16	SN	16	25,0	1"	M42X2	30	85,0	70,0	50,0
A29977-20-20	SN	20	32,0	1 1/4"	M52X2	38	97,0	92,0	60,0
A29977-20-24	TN	24	38,0	1 1/2"	M52X2	38	106,0	95,0	60,0