


// NEW POWERTRAK - INSERTI BSP *BSP INSERTS*

// 290120 - MASCHIO BSPP CILINDRICO SV. 60° - AGR


// BSPP MALE 60° FLARE - AGR

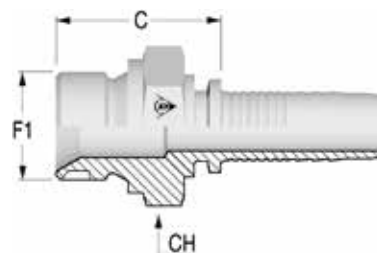

Code	Nut Type	ID			F1	F1	C	CH
		Dash	mm	In	Dash Size		mm	mm
290120-12-12	NA	12	19,0	3/4"	12	3/4-14	37,5	32,0
290120-16-16	NA	16	25,0	1"	16	1-11	44,5	41,0
290120-20-20	NA	20	32,0	1 1/4"	20	1 1/4-11	95,5	50,0
290120-24-24	NA	24	38,0	1 1/2"	24	1 1/2-11	56,0	55,0
290120-32-32	NA	32	51,0	2"	32	2-11	71,5	70,0


// A29001 - FEMMINA BSPP CILINDRICA SV. 60° CON O'RING - DKOR

// BSPP FEMALE 60° CONE WITH O'RING - DKOR

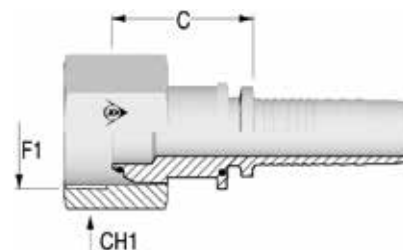


Code	Nut Type	ID			F1	F1	C	CH1
		Dash	mm	In	Dash Size		mm	mm
A29001-12-12	TN	12	19,0	3/4"	12	3/4-14	25,2	32,0
A29001-16-12	TN	12	19,0	3/4"	16	1-11	27,7	38,0
A29001-16-16	TN	16	25,0	1"	16	1-11	31,0	38,0
A29001-20-16	TN	16	25,0	1"	20	1 1/4-11	32,0	50,0
A29001-20-20	TN	20	32,0	1 1/4"	20	1 1/4-11	35,0	50,0
A29001-24-24	TN	24	38,0	1 1/2"	24	1 1/2-11	38,8	55,0
A29001-32-32	TN	32	51,0	2"	32	2-11	49,0	70,0

// A29061 - FEMMINA 45° BSPP CILINDRICA SV. 60° CON O'RING - DKOR 45
// 45° BSPP FEMALE 60° CONE WITH O'RING - DKOR 45

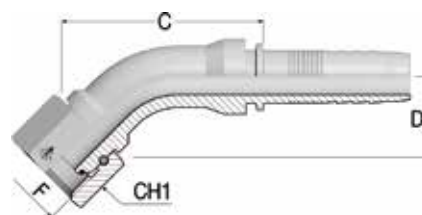

Code	Nut Type	ID			F1		C	D Drop	CH
		Dash	mm	In	Dash Size	F1			
A29061-12-12	TN	12	19,0	3/4"	12	3/4-14	75,2	30,0	32,0
A29061-16-16	TN	16	25,0	1"	16	1-11	92,1	40,0	38,0
A29061-20-20	TN	20	32,0	1 1/4"	20	1 1/4-11	90,4	40,0	50,0
A29061-24-24	TN	24	38,0	1 1/2"	24	1 1/2-11	113,0	46,0	55,0
A29061-32-32	TN	32	51,0	2"	32	2-11	153,5	60,0	70,0

// A29051 - FEMMINA 90° BSPP CILINDRICA SV. 60° CON O'RING - DKOR 90
// 90° BSPP FEMALE 60° CONE WITH O'RING - DKOR 90

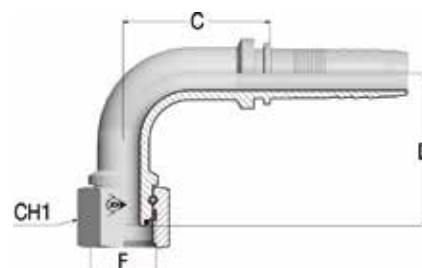

Code	Nut Type	ID			F1		C	D Drop	CH
		Dash	mm	In	Dash Size	F1			
A29051-12-12	TN	12	19,0	3/4"	12	3/4-14	59,1	61,0	32,0
A29051-16-16	TN	16	25,0	1"	16	1-11	73,7	71,0	38,0
A29051-20-20	TN	20	32,0	1 1/4"	20	1 1/4-11	84,3	83,0	50,0
A29051-24-24	TN	24	38,0	1 1/2"	24	1 1/2-11	98,7	96,0	55,0
A29051-32-32	TN	32	51,0	2"	32	2-11	140,5	130,0	70,0