


// SUPERTRAK - INSERTI ORFS *ORFS INSERTS*


// 55A290 - MASCHIO ORFS

// ORFS MALE




Code	Nut Type	ID			F1	F1	C	CH
		Dash	mm	In	Dash Size		mm	mm
55A290-04-04	NA	04	6,0	1/4"	04	9/16-18	22,3	17,0
55A290-06-04	NA	04	6,0	1/4"	06	11/16-16	24,3	19,0
55A290-06-05	NA	05	8,0	5/16"	06	11/16-16	24,3	19,0
55A290-06-06	NA	06	10,0	3/8"	06	11/16-16	24,3	19,0
55A290-08-06	NA	06	10,0	3/8"	08	13/16-16	26,3	22,0
55A290-10-06	NA	06	10,0	3/8"	10	1-14	29,8	27,0
55A290-08-08	NA	08	13,0	1/2"	08	13/16-16	27,1	22,0
55A290-10-08	NA	08	13,0	1/2"	10	1-14	30,6	27,0
55A290-12-08	NA	08	13,0	1/2"	12	1 3/16-12	34,1	32,0
55A290-10-10	NA	10	16,0	5/8"	10	1-14	30,6	27,0
55A290-12-10	NA	10	16,0	5/8"	12	1 3/16-12	34,1	32,0
55A290-10-12	NA	12	19,0	3/4"	10	1-14	31,1	27,0
55A290-12-12	NA	12	19,0	3/4"	12	1 3/16-12	34,6	32,0
55A290-16-12	NA	12	19,0	3/4"	16	1 7/16-12	38,1	41,0
55A290-16-16	NA	16	25,0	1"	16	1 7/16-12	37,9	38,0
55A290-20-16	NA	16	25,0	1"	20	1 11/16-12	39,9	46,0
55A290-20-20	NA	20	32,0	1 1/4"	20	1 11/16-12	41,5	46,0

// A55H26 - FEMMINA ORFS CON CONTRO-ESAGONO
// ORFS FEMALE WITH STEM HEXAGON

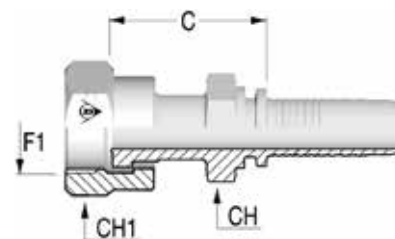


Code	Nut Type	ID			F1	F1	C	CH	CH1
		Dash	mm	In	Dash Size		mm	mm	mm
A55H26-04-03	SN	03	5,0	3/16"	04	9/16-18	26,8	14,0	17,0
A55H26-04-04	SN	04	6,0	1/4"	04	9/16-18	27,3	14,0	17,0
A55H26-06-04	SN	04	6,0	1/4"	06	11/16-16	30,3	17,0	22,0
A55H26-08-04	SN	04	6,0	1/4"	08	13/16-16	35,3	22,0	24,0
A55H26-06-05	SN	05	8,0	5/16"	06	11/16-16	30,3	17,0	22,0
A55H26-04-06	SN	06	10,0	3/8"	04	9/16-18	28,3	17,0	17,0
A55H26-06-06	SN	06	10,0	3/8"	06	11/16-16	30,3	17,0	22,0
A55H26-08-06	SN	06	10,0	3/8"	08	13/16-16	35,3	22,0	24,0
A55H26-06-08	SN	08	13,0	1/2"	06	11/16-16	32,1	19,0	22,0
A55H26-08-08	SN	08	13,0	1/2"	08	13/16-16	36,1	22,0	24,0
A55H26-10-08	SN	08	13,0	1/2"	10	1-14	39,6	24,0	30,0
A55H26-12-08	SN	08	13,0	1/2"	12	1 3/16-12	42,1	30,0	36,0
A55H26-08-10	SN	10	16,0	5/8"	08	13/16-16	37,1	24,0	24,0
A55H26-10-10	SN	10	16,0	5/8"	10	1-14	39,6	24,0	30,0
A55H26-12-10	SN	10	16,0	5/8"	12	1 3/16-12	42,1	30,0	36,0
A55H26-10-12	SN	12	19,0	3/4"	10	1-14	40,1	27,0	30,0
A55H26-12-12	SN	12	19,0	3/4"	12	1 3/16-12	42,6	30,0	36,0
A55H26-16-12	SN	12	19,0	3/4"	16	1 7/16-12	48,6	36,0	41,0
A55H26-12-16	SN	16	25,0	1"	12	1 3/16-12	45,4	32,0	36,0
A55H26-16-16	SN	16	25,0	1"	16	1 7/16-12	49,4	36,0	41,0
A55H26-20-16	SN	16	25,0	1"	20	1 11/16-12	50,4	41,0	50,0
A55H26-20-20	SN	20	32,0	1 1/4"	20	1 11/16-12	52,0	41,0	50,0
A55H26-24-20	SN	20	32,0	1 1/4"	24	2-12	56,5	50,0	60,0
A55H26-24-24	SN	24	38,0	1 1/2"	24	2-12	56,5	50,0	60,0

// A55A27 - FEMMINA 45° ORFS MEDIUM DROP - DK ORFS 45M
// 45° ORFS FEMALE MEDIUM DROP - DK ORFS 45M

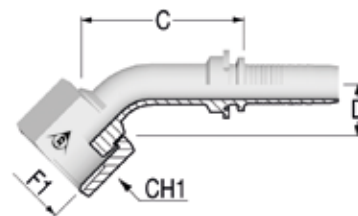


Code	Nut Type	ID			F1	F1	C	D Drop	CH1
		Dash	mm	In					
A55A27-04-04	SN	04	6,0	1/4"	04	9/16-18	41,1	11,0	17,0
A55A27-06-04	SN	04	6,0	1/4"	06	11/16-16	46,1	11,0	22,0
A55A27-06-05	SN	05	8,0	5/16"	06	11/16-16	46,3	12,0	22,0
A55A27-06-06	SN	06	10,0	3/8"	06	11/16-16	47,4	12,0	22,0
A55A27-08-06	SN	06	10,0	3/8"	08	13/16-16	51,2	15,0	24,0
A55A27-08-08	CR	08	13,0	1/2"	08	13/16-16	47,1	16,0	24,0
A55A27-10-08	SN	08	13,0	1/2"	10	1-14	50,4	16,5	30,0
A55A27-10-10	SN	10	16,0	5/8"	10	1-14	57,7	17,0	30,0
A55A27-12-10	SN	10	16,0	5/8"	12	1 3/16-12	63,1	21,0	36,0
A55A27-10-12	CR	12	19,0	3/4"	10	1-14	51,4	24,0	30,0
A55A27-12-12	SN	12	19,0	3/4"	12	1 3/16-12	63,5	21,0	36,0
A55A27-16-12	SN	12	19,0	3/4"	16	1 7/16-12	70,7	24,0	41,0
A55A27-16-16	SN	16	25,0	1"	16	1 7/16-12	82,4	26,0	41,0
A55A27-20-16	SN	16	25,0	1"	20	1 11/16-12	85,4	26,0	50,0
A55A27-20-20	SN	20	32,0	1 1/4"	20	1 11/16-12	97,4	26,0	50,0
A55A27-24-24	SN	24	38,0	1 1/2"	24	2-12	104,4	28,0	60,0

// A55A29 - FEMMINA 90° ORFS SHORT DROP - DK ORFS 90S
// 90° ORFS FEMALE SHORT DROP - DK ORFS 90S

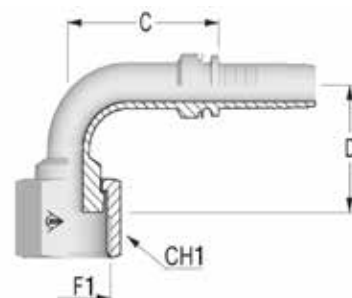


Code	Nut Type	ID			F1	F1	C	D Drop	CH1
		Dash	mm	In					
A55A29-04-04	SN	04	6,0	1/4"	04	9/16-18	28,5	21,0	17,0
A55A29-06-04	SN	04	6,0	1/4"	06	11/16-16	32,0	23,0	22,0
A55A29-06-05	SN	05	8,0	5/16"	06	11/16-16	49,3	23,0	22,0
A55A29-06-06	SN	06	10,0	3/8"	06	11/16-16	41,8	25,0	22,0
A55A29-08-06	SN	06	10,0	3/8"	08	13/16-16	41,8	29,0	24,0
A55A29-06-08	CR	08	13,0	1/2"	06	11/16-16	44,1	25,0	22,0
A55A29-08-08	CR	08	13,0	1/2"	08	13/16-16	39,8	29,0	24,0
A55A29-10-08	SN	08	13,0	1/2"	10	1-14	46,3	32,5	30,0
A55A29-12-08	SN	08	13,0	1/2"	12	1 3/16-12	56,3	51,0	36,0
A55A29-10-10	SN	10	16,0	5/8"	10	1-14	52,3	32,5	30,0
A55A29-12-10	SN	10	16,0	5/8"	12	1 3/16-12	55,4	49,0	36,0
A55A29-12-12	SN	12	19,0	3/4"	12	1 3/16-12	60,6	51,0	36,0
A55A29-16-12	SN	12	19,0	3/4"	16	1 7/16-12	61,6	56,0	41,0
A55A29-12-16	CR	16	25,0	1"	12	1 3/16-12	54,6	51,0	36,0
A55A29-16-16	SN	16	25,0	1"	16	1 7/16-12	80,0	58,0	41,0
A55A29-20-16	SN	16	25,0	1"	20	1 11/16-12	82,6	64,0	50,0
A55A29-20-20	SN	20	32,0	1 1/4"	20	1 11/16-12	95,0	68,0	50,0
A55A29-24-24	SN	24	38,0	1 1/2"	24	2-12	103,7	78,0	60,0

// A55A28 - FEMMINA 90° ORFS MEDIUM DROP - DK ORFS 90M
// 90° ORFS FEMALE MEDIUM DROP - DK ORFS 90M

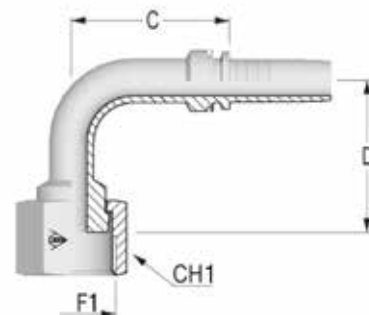

Code	Nut Type	ID			F1	F1	C	D Drop	CH1
		Dash	mm	In	Dash Size		mm	mm	mm
A55A28-04-04	SN	04	6,0	1/4"	04	9/16-18	29,8	32,0	17,0
A55A28-06-04	SN	04	6,0	1/4"	06	11/16-16	37,3	38,0	22,0
A55A28-06-05	SN	05	8,0	5/16"	06	11/16-16	40,7	34,0	22,0
A55A28-06-06	SN	06	10,0	3/8"	06	11/16-16	41,8	38,0	22,0
A55A28-08-06	SN	06	10,0	3/8"	08	13/16-16	43,8	41,0	24,0
A55A28-08-08	CR	08	13,0	1/2"	08	13/16-16	34,8	42,0	24,0
A55A28-10-08	SN	08	13,0	1/2"	10	1-14	48,3	47,0	30,0
A55A28-10-10	SN	10	16,0	5/8"	10	1-14	55,4	44,0	30,0
A55A28-12-10	SN	10	16,0	5/8"	12	1 3/16-12	55,4	58,0	36,0
A55A28-12-12	SN	12	19,0	3/4"	12	1 3/16-12	61,6	58,0	36,0
A55A28-16-12	SN	12	19,0	3/4"	16	1 7/16-12	65,6	71,0	41,0
A55A28-12-16	CR	16	25,0	1"	12	1 3/16-12	62,6	58,0	36,0
A55A28-16-16	SN	16	25,0	1"	16	1 7/16-12	82,6	66,0	41,0
A55A28-20-16	SN	16	25,0	1"	20	1 11/16-12	82,6	78,0	50,0
A55A28-20-20	SN	20	32,0	1 1/4"	20	1 11/16-12	97,0	78,0	50,0
A55A28-24-24	SN	24	38,0	1 1/2"	24	2-12	107,8	87,0	60,0

// A55A30 - FEMMINA 90° ORFS LONG DROP - DK ORFS 90L
// 90° ORFS FEMALE LONG DROP - DK ORFS 90L

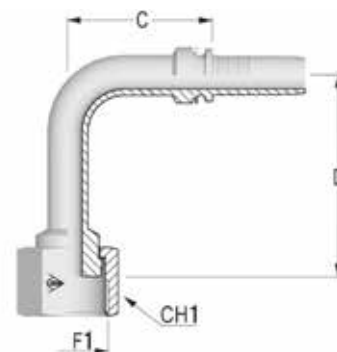

Code	Nut Type	ID			F1	F1	C	D Drop	CH1
		Dash	mm	In	Dash Size		mm	mm	mm
A55A30-04-04	SN	04	6,0	1/4"	04	9/16-18	32,8	46,0	17,0
A55A30-06-04	SN	04	6,0	1/4"	06	11/16-16	34,8	54,0	22,0
A55A30-06-06	SN	06	10,0	3/8"	06	11/16-16	41,8	54,0	22,0
A55A30-08-06	SN	06	10,0	3/8"	08	13/16-16	46,8	64,0	24,0
A55A30-08-08	CR	08	13,0	1/2"	08	13/16-16	38,3	64,0	24,0
A55A30-10-08	SN	08	13,0	1/2"	10	1-14	46,3	70,0	30,0
A55A30-10-10	SN	10	16,0	5/8"	10	1-14	55,4	70,0	30,0
A55A30-12-10	SN	10	16,0	5/8"	12	1 3/16-12	55,4	96,0	36,0
A55A30-12-12	SN	12	19,0	3/4"	12	1 3/16-12	61,6	96,0	36,0
A55A30-16-12	SN	12	19,0	3/4"	16	1 7/16-12	61,6	118,0	41,0
A55A30-16-16	SN	16	25,0	1"	16	1 7/16-12	82,6	114,0	41,0
A55A30-20-20	SN	20	32,0	1 1/4"	20	1 11/16-12	97,0	129,0	50,0
A55A30-24-24	SN	24	38,0	1 1/2"	24	2-12	110,8	141,0	60,0