


// POWERTRAK EXTRA - INSERTI ORFS ORFS INSERTS

// 39A290 - MASCHIO ORFS


// ORFS MALE

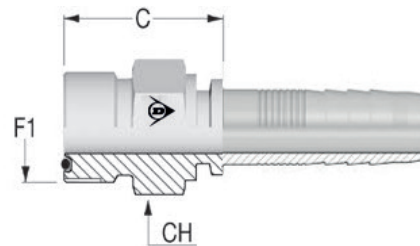

Code	Nut Type	ID			F1	F1	C	CH
		Dash	mm	In	Dash Size		mm	mm
39A290-06-06		6	10,0	3/8"	6	11/16-16	25,0	19,0
39A290-08-08		8	13,0	1/2"	8	13/16-16	27,1	22,0
39A290-10-10		10	16,0	5/8"	10	1-14	31,3	27,0
39A290-12-12		12	19,0	3/4"	12	1 3/16-12	36,1	32,0
39A290-16-16		16	25,0	1"	16	1 7/16-12	40,6	38,0
39A290-20-20		20	32,0	1 1/4"	20	1 11/16-12	43,4	46,0
39A290-24-24		24	38,0	1 1/2"	24	2-12	TBD	TBD

// A39A26 - FEMMINA ORFS CON CONTRO-ESAGONO


// ORFS FEMALE WITH STEM HEXAGON

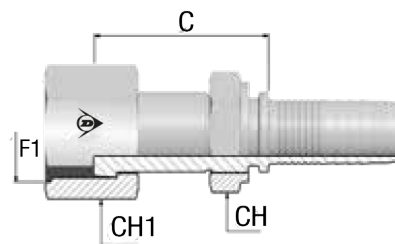

Code	Nut Type	ID			F1	F1	C	CH	CH1
		Dash	mm	In	Dash Size		mm	mm	mm
A39A26-06-06	CR	6	10,0	3/8"	6	11/16-16	31,0	17,0	22,0
A39A26-08-08	CR	8	13,0	1/2"	8	13/16-16	36,1	22,0	24,0
A39A26-10-10	CR	10	16,0	5/8"	10	1-14	40,3	24,0	30,0
A39A26-12-10	CR	10	16,0	5/8"	12	1 3/16-12	TBD	TBD	36,0
A39A26-12-12	CR	12	19,0	3/4"	12	1 3/16-12	44,1	30,0	36,0
A39A26-12-16	CR	16	25,0	1"	12	1 3/16-12	TBD	TBD	36,0
A39A26-16-12	CR	12	19,0	3/4"	16	1 7/16-12	50,1	36,0	41,0
A39A26-16-16	CR	16	25,0	1"	16	1 7/16-12	53,1	36,0	41,0
A39A26-20-16	CR	16	25,0	1"	20	1 11/16-12	54,1	41,0	50,0
A39A26-20-20	CR	20	32,0	1 1/4"	20	1 11/16-12	56,0	46,0	50,0
A39A26-24-24	CR	24	38,0	1 1/2"	24	2-12	61,5	50,0	60,0

// A39A27 - FEMMINA 45° ORFS MEDIUM DROP - DK ORFS 45M


// 45° ORFS FEMALE MEDIUM DROP - DK ORFS 45M

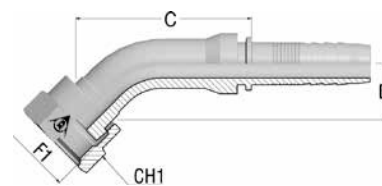

Code	Nut Type	ID			F1	F1	C	D Drop	CH1
		Dash	mm	In	Dash Size		mm	mm	mm
A39A27-06-06	SN	6	10,0	3/8"	6	11/16-16	48,0	17,0	22,0
A39A27-08-08	CR	8	13,0	1/2"	8	13/16-16	54,0	22,0	24,0
A39A27-10-10	SN	10	16,0	5/8"	10	1-14	58,0	17,0	30,0
A39A27-12-12	CR	12	19,0	3/4"	12	1 3/16-12	82,0	26,0	36,0
A39A27-12-12	SN	12	19,0	3/4"	12	1 3/16-12	67,0	21,0	36,0
A39A27-16-12	CR	12	19,0	3/4"	16	1 7/16-12	81,0	28,0	41,0
A39A27-16-16	CR	16	25,0	1"	16	1 7/16-12	95,0	28,0	41,0
A39A27-20-16	CR	16	25,0	1"	20	1 11/16-12	88,0	28,0	50,0
A39A27-20-20	CR	20	32,0	1 1/4"	20	1 11/16-12	108,0	36,5	50,0
A39A27-24-24	CR	24	38	1 1/2"	24	2-12	TBD	TBD	60,0

// A39A28 - FEMMINA 90° ORFS MEDIUM DROP - DK ORFS 90M

// 90° ORFS FEMALE MEDIUM DROP - DK ORFS 90M

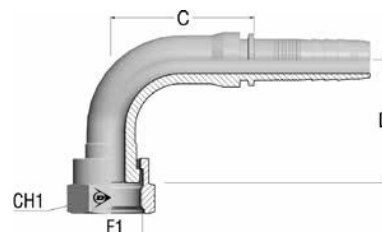

Code	Nut Type	ID			F1	F1	C	D Drop	CH1
		Dash	mm	In	Dash Size		mm	mm	mm
A39A28-06-06	SN	6	10,0	3/8"	6	11/16-16	43,0	38,0	22,0
A39A28-08-08	CR	8	13,0	1/2"	8	13/16-16	35,0	42,0	24,0
A39A28-10-10	SN	10	16,0	5/8"	10	1-14	56,0	44,0	30,0
A39A28-12-12	CR	12	19,0	3/4"	12	1 3/16-12	68,0	58,0	36,0
A39A28-12-12	SN	12	19,0	3/4"	12	1 3/16-12	63,0	58,0	36,0
A39A28-16-12	CR	12	19,0	3/4"	16	1 7/16-12	70,0	58,0	36,0
A39A28-16-16	CR	16	25,0	1"	16	1 7/16-12	80,0	66,0	41,0
A39A28-20-16	CR	16	25,0	1"	20	1 11/16-12	TBD	TBD	50,0
A39A28-20-20	CR	20	32,0	1 1/4"	20	1 11/16-12	101,0	81,0	50,0
A39A28-24-24	CR	24	38	1 1/2"	24	2-12	TBD	TBD	60,0