


// SUPERTRAK - INSERTI METRICI DIN DIN METRIC INSERTS


// 551690 - MASCHIO METRICO SV. 24° DIN 3853 SERIE LEGGERA - CEL

// METRIC MALE 24° SEAT - LIGHT - DIN 3853 - CEL

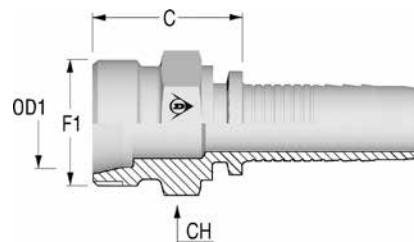

Code	Nut Type	ID			F1	OD1	C	CH
		Dash	mm	In		mm	mm	mm
551690-03-03	NA	03	5,0	3/16"	M12X1.5	6	20,8	14,0
551690-03-04	NA	04	6,0	1/4"	M12X1.5	6	21,3	14,0
551690-04-04	NA	04	6,0	1/4"	M14X1.5	8	21,3	14,0
551690-05-04	NA	04	6,0	1/4"	M16X1.5	10	23,3	17,0
551690-05-05	NA	05	8,0	5/16"	M16X1.5	10	23,3	17,0
551690-06-05	NA	05	8,0	5/16"	M18X1.5	12	24,3	19,0
551690-05-06	NA	06	10,0	3/8"	M16X1.5	10	23,3	17,0
551690-06-06	NA	06	10,0	3/8"	M18X1.5	12	24,3	19,0
551690-08-06	NA	06	10,0	3/8"	M22X1.5	15	25,3	22,0
551690-06-08	NA	08	13,0	1/2"	M18X1.5	12	25,1	19,0
551690-08-08	NA	08	13,0	1/2"	M22X1.5	15	26,1	22,0
551690-10-08	NA	08	13,0	1/2"	M26X1.5	18	27,1	27,0
551690-10-10	NA	10	16,0	5/8"	M26X1.5	18	27,1	27,0
551690-12-12	NA	12	19,0	3/4"	M30X2	22	31,6	32,0
551690-16-16	NA	16	25,0	1"	M36X2	28	34,4	36,0
551690-20-20	NA	20	32,0	1 1/4"	M45X2	35	40,0	46,0
551690-24-24	NA	24	38,0	1 1/2"	M52X2	42	42,0	55,0


// A55146 - FEMMINA METRICA SV. 24° CON O'RING DIN 3865 SERIE LEGGERA - DKOL
 // METRIC FEMALE 24° CONE WITH O'RING - LIGHT - DIN 3865 - DKOL

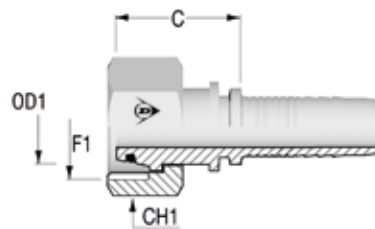

Code	Nut Type	ID			F1	OD1	C	CH1
		Dash	mm	In		mm	mm	mm
A55146-03-03	SN	03	5,0	3/16"	M12X1.5	6	23,9	14,0
A55146-03-04	CR	04	6,0	1/4"	M12X1.5	6	20,3	14,0
A55146-04-04	TN	04	6,0	1/4"	M14X1.5	8	22,9	17,0
A55146-05-04	SN	04	6,0	1/4"	M16X1.5	10	25,4	19,0
A55146-06-04	SN	04	6,0	1/4"	M18X1.5	12	25,4	22,0
A55146-04-05	TN	05	8,0	5/16"	M14X1.5	8	47,7	17,0
A55146-05-05	TN	05	8,0	5/16"	M16X1.5	10	23,2	19,0
A55146-06-05	SN	05	8,0	5/16"	M18X1.5	12	25,4	22,0
A55146-05-06	TN	06	10,0	3/8"	M16X1.5	10	25,4	19,0
A55146-06-06	SN	06	10,0	3/8"	M18X1.5	12	25,4	22,0
A55146-08-06	SN	06	10,0	3/8"	M22X1.5	15	27,4	27,0
A55146-06-08	TN	08	13,0	1/2"	M18X1.5	12	24,0	22,0
A55146-08-08	TN	08	13,0	1/2"	M22X1.5	15	25,3	27,0
A55146-10-08	SN	08	13,0	1/2"	M26X1.5	18	29,2	32,0
A55146-08-10	TN	10	16,0	5/8"	M22X1.5	15	25,3	27,0
A55146-10-10	TN	10	16,0	5/8"	M26X1.5	18	25,0	32,0
A55146-10-12	TN	12	19,0	3/4"	M26X1.5	18	25,5	32,0
A55146-12-12	SN	12	19,0	3/4"	M30X2	22	31,7	36,0
A55146-16-12	SN	12	19,0	3/4"	M36X2	28	32,8	41,0
A55146-12-16	TN	16	25,0	1"	M30X2	22	44,6	36,0
A55146-16-16	SN	16	25,0	1"	M36X2	28	33,6	41,0
A55146-20-16	SN	16	25,0	1"	M45X2	35	38,5	50,0
A55146-20-20	SN	20	32,0	1 1/4"	M45X2	35	40,1	50,0
A55146-24-24	SN	24	38,0	1 1/2"	M52X2	42	40,5	60,0

**// A55A51 - FEMMINA 45° METRICA SV. 24° CON O'RING DIN 3865 SERIE
LEGGERA - DKOL 45**


// 45° METRIC FEMALE 24° CONE WITH O'RING - LIGHT - DIN 3865 - DKOL 45

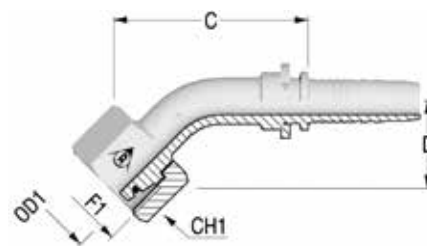

Code	Nut Type	ID			F1	OD1	C	D Drop	CH1
		Dash	mm	In		mm	mm	mm	mm
A55A51-03-03	SN	03	5,0	3/16"	M12X1.5	6	44,9	19,0	14,0
A55A51-03-04	CR	04	6,0	1/4"	M12X1.5	6	45,2	15,5	14,0
A55A51-04-04	SN	04	6,0	1/4"	M14X1.5	8	43,0	17,5	17,0
A55A51-05-04	SN	04	6,0	1/4"	M16X1.5	10	42,0	20,0	19,0
A55A51-04-05	SN	05	8,0	5/16"	M14X1.5	8	47,5	20,0	17,0
A55A51-05-05	SN	05	8,0	5/16"	M16X1.5	10	47,5	20,0	19,0
A55A51-06-05	SN	05	8,0	5/16"	M18X1.5	12	47,0	22,0	22,0
A55A51-05-06	TN	06	10,0	3/8"	M16X1.5	10	43,0	19,0	19,0
A55A51-06-06	SN	06	10,0	3/8"	M18X1.5	12	46,8	19,5	22,0
A55A51-06-08	TN	08	13,0	1/2"	M18X1.5	12	52,0	23,0	22,0
A55A51-08-08	SN	08	13,0	1/2"	M22X1.5	15	55,0	21,0	27,0
A55A51-10-10	SN	10	16,0	5/8"	M26X1.5	18	65,3	24,0	32,0
A55A51-10-12	TN	12	19,0	3/4"	M26X1.5	18	77,0	34,0	32,0
A55A51-12-12	SN	12	19,0	3/4"	M30X2	22	69,4	32,0	36,0
A55A51-12-16	TN	16	25,0	1"	M30X2	22	71,1	29,0	36,0
A55A51-16-16	SN	16	25,0	1"	M36X2	28	91,4	32,0	41,0
A55A51-20-20	SN	20	32,0	1 1/4"	M45X2	35	100,0	45,0	50,0
A55A51-24-24	SN	24	38,0	1 1/2"	M52X2	42	114,1	47,0	60,0


**// A55A50 - FEMMINA 90° METRICA SV. 24° CON O'RING DIN 3865 SERIE
LEGGERA - DKOL 90**

// 90° METRIC FEMALE 24° CONE WITH O'RING - LIGHT - DIN 3865 - DKOL 90

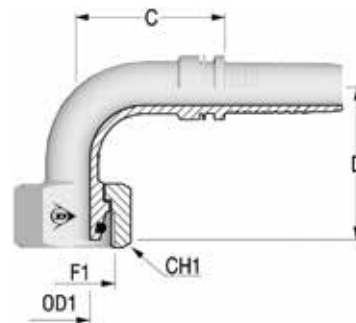


Code	Nut Type	ID			F1	OD1	C	D Drop	CH1
		Dash	mm	In					
A55A50-03-04	TN	04	6,0	1/4"	M12X1.5	6	29,0	34,0	14,0
A55A50-04-04	SN	04	6,0	1/4"	M14X1.5	8	28,3	32,5	17,0
A55A50-05-04	SN	04	6,0	1/4"	M16X1.5	10	28,3	32,5	19,0
A55A50-06-04	SN	04	6,0	1/4"	M18X1.5	12	28,8	35,0	22,0
A55A50-05-05	SN	05	8,0	5/16"	M16X1.5	10	33,7	38,0	19,0
A55A50-06-05	SN	05	8,0	5/16"	M18X1.5	12	32,2	40,0	22,0
A55A50-05-06	TN	06	10,0	3/8"	M16X1.5	10	35,0	36,0	19,0
A55A50-06-06	SN	06	10,0	3/8"	M18X1.5	12	32,8	39,0	22,0
A55A50-08-06	SN	06	10,0	3/8"	M22X1.5	15	35,8	38,5	27,0
A55A50-06-08	TN	08	13,0	1/2"	M18X1.5	12	42,0	44,0	22,0
A55A50-08-08	SN	08	13,0	1/2"	M22X1.5	15	39,8	40,5	27,0
A55A50-10-08	SN	08	13,0	1/2"	M26X1.5	18	39,8	41,0	32,0
A55A50-08-10	SN	10	16,0	5/8"	M22X1.5	15	51,4	47,0	27,0
A55A50-10-10	SN	10	16,0	5/8"	M26X1.5	18	51,4	48,0	32,0
A55A50-12-10	SN	10	16,0	5/8"	M30X2	22	52,4	49,0	36,0
A55A50-10-12	TN	12	19,0	3/4"	M26X1.5	18	60,0	64,0	32,0
A55A50-12-12	SN	12	19,0	3/4"	M30X2	22	52,1	59,0	36,0
A55A50-16-12	SN	12	19,0	3/4"	M36X2	28	60,0	63,0	41,0
A55A50-12-16	TN	16	25,0	1"	M30X2	22	66,0	64,0	36,0
A55A50-16-16	SN	16	25,0	1"	M36X2	28	75,0	68,0	41,0
A55A50-16-20	TN	20	32,0	1 1/4"	M36X2	28	92,2	86,0	41,0
A55A50-20-20	SN	20	32,0	1 1/4"	M45X2	35	90,5	89,0	50,0
A55A50-24-24	SN	24	38,0	1 1/2"	M52X2	42	106,5	100,0	60,0

// 551700 - MASCHIO METRICO SV. 24° DIN 3853 SERIE PESANTE - CES
// METRIC MALE 24° SEAT - HEAVY - DIN 3853 - CES

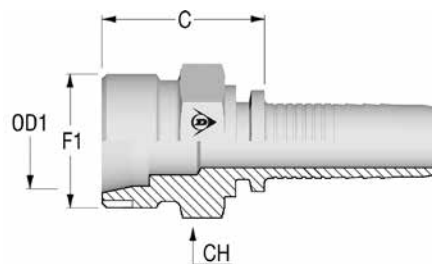

Code	Nut Type	ID			F1	OD1	C	CH
		Dash	mm	In		mm	mm	mm
551700-02-04	NA	04	6,0	1/4"	M14X1.5	6	24,3	17,0
551700-03-04	NA	04	6,0	1/4"	M16X1.5	8	24,3	17,0
551700-04-04	NA	04	6,0	1/4"	M18X1.5	10	25,3	19,0
551700-05-05	NA	05	8,0	5/16"	M20X1.5	12	25,3	22,0
551700-04-06	NA	06	10,0	3/8"	M18X1.5	10	25,3	19,0
551700-05-06	NA	06	10,0	3/8"	M20X1.5	12	25,3	22,0
551700-06-06	NA	06	10,0	3/8"	M22X1.5	14	27,3	22,0
551700-06-08	NA	08	13,0	1/2"	M22X1.5	14	28,1	22,0
551700-08-08	NA	08	13,0	1/2"	M24X1.5	16	29,1	24,0
551700-10-08	NA	08	13,0	1/2"	M30X2	20	33,1	32,0
551700-10-10	NA	10	16,0	5/8"	M30X2	20	33,1	32,0
551700-10-12	NA	12	19,0	3/4"	M30X2	20	33,6	32,0
551700-12-12	NA	12	19,0	3/4"	M36X2	25	37,6	36,0
551700-12-16	NA	16	25,0	1"	M36X2	25	38,4	36,0
551700-16-16	NA	16	25,0	1"	M42X2	30	42,4	46,0
551700-20-20	NA	20	32,0	1 1/4"	M52X2	38	48,0	55,0


// A55179 - FEMMINA METRICA SV. 24° CON O'RING DIN 3865 SERIE PESANTE - DKOS
// METRIC FEMALE 24° CONE WITH O'RING - HEAVY - DIN 3865 - DKOS

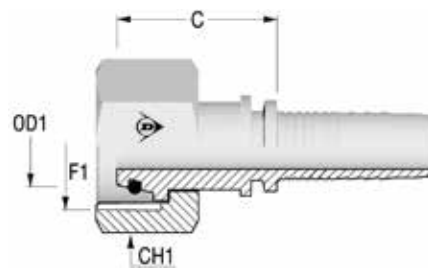

Code	Nut Type	ID			F1	OD1	C	CH1
		Dash	mm	In		mm	mm	mm
A55179-03-03	SN	03	5,0	3/16"	M16X1.5	8	27,2	19,0
A55179-03-04	SN	04	6,0	1/4"	M16X1.5	8	27,7	19,0
A55179-04-04	SN	04	6,0	1/4"	M18X1.5	10	27,6	22,0
A55179-05-04	SN	04	6,0	1/4"	M20X1.5	12	27,6	24,0
A55179-04-05	SN	05	8,0	5/16"	M18X1.5	10	27,6	22,0
A55179-05-05	SN	05	8,0	5/16"	M20X1.5	12	27,6	24,0
A55179-04-06	TN	06	10,0	3/8"	M18X1.5	10	22,3	22,0
A55179-05-06	SN	06	10,0	3/8"	M20X1.5	12	27,6	24,0
A55179-06-06	SN	06	10,0	3/8"	M22X1.5	14	31,1	27,0
A55179-08-06	SN	06	10,0	3/8"	M24X1.5	16	30,9	30,0
A55179-05-08	TN	08	13,0	1/2"	M20X1.5	12	23,2	24,0
A55179-06-08	SN	08	13,0	1/2"	M22X1.5	14	31,9	27,0
A55179-08-08	SN	08	13,0	1/2"	M24X1.5	16	31,7	30,0
A55179-10-08	SN	08	13,0	1/2"	M30X2	20	36,5	36,0
A55179-10-10	SN	10	16,0	5/8"	M30X2	20	36,5	36,0
A55179-10-12	SN	12	19,0	3/4"	M30X2	20	37,0	36,0
A55179-12-12	SN	12	19,0	3/4"	M36X2	25	40,2	46,0
A55179-10-16	TN	16	25,0	1"	M30X2	20	29,8	36,0
A55179-12-16	SN	16	25,0	1"	M36X2	25	41,0	46,0
A55179-16-16	SN	16	25,0	1"	M42X2	30	43,1	50,0
A55179-16-20	SN	20	32,0	1 1/4"	M42X2	30	44,7	50,0
A55179-20-20	SN	20	32,0	1 1/4"	M52X2	38	48,1	60,0
A55179-20-24	SN	24	38,0	1 1/2"	M52X2	38	48,1	60,0

// A55A56 - FEMMINA 45° METRICA SV. 24° CON O'RING DIN 3865 SERIE PESANTE - DKOS 45


// 45° METRIC FEMALE 24° CONE WITH O'RING - HEAVY - DIN 3865 - DKOS 45

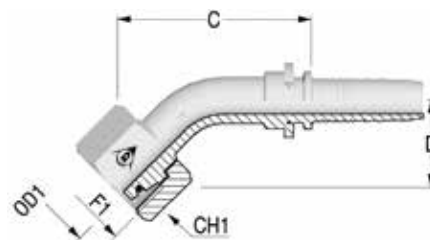

Code	Nut Type	ID			F1	OD1	C	D Drop	CH1
		Dash	mm	In		mm	mm	mm	mm
A55A56-03-04	SN	04	6,0	1/4"	M16X1.5	8	48,6	16,0	19,0
A55A56-04-04	SN	04	6,0	1/4"	M18X1.5	10	43,5	19,0	22,0
A55A56-05-05	SN	05	8,0	5/16"	M20X1.5	12	48,1	21,0	24,0
A55A56-05-06	SN	06	10,0	3/8"	M20X1.5	12	50,6	20,0	24,0
A55A56-06-06	SN	06	10,0	3/8"	M22X1.5	14	52,9	21,0	27,0
A55A56-05-08	TN	08	13,0	1/2"	M20X1.5	12	54,0	24,0	24,0
A55A56-08-08	SN	08	13,0	1/2"	M24X1.5	16	55,8	21,5	30,0
A55A56-10-10	SN	10	16,0	5/8"	M30X2	20	66,3	30,0	36,0
A55A56-10-12	SN	12	19,0	3/4"	M30X2	20	66,1	29,0	36,0
A55A56-12-12	SN	12	19,0	3/4"	M36X2	25	69,5	33,0	46,0
A55A56-12-16	SN	16	25,0	1"	M36X2	25	89,7	36,0	46,0
A55A56-16-16	SN	16	25,0	1"	M42X2	30	110,3	40,5	50,0
A55A56-20-20	SN	20	32,0	1 1/4"	M52X2	38	109,0	45,0	60,0


// A55A57 - FEMMINA 90° METRICA SV. 24° CON O'RING DIN 3865 SERIE PESANTE - DKOS 90

// 90° METRIC FEMALE 24° CONE WITH O'RING - HEAVY - DIN 3865 - DKOS 90

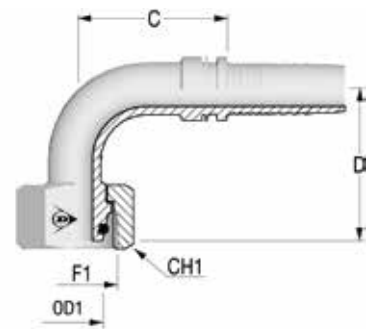


Code	Nut Type	ID			F1	OD1	C	D Drop	CH1
		Dash	mm	In		mm	mm	mm	mm
A55A57-03-04	SN	04	6,0	1/4"	M16X1.5	8	27,3	33,0	19,0
A55A57-04-04	SN	04	6,0	1/4"	M18X1.5	10	26,8	34,0	22,0
A55A57-04-05	SN	05	8,0	5/16"	M18X1.5	10	33,2	39,0	22,0
A55A57-05-05	SN	05	8,0	5/16"	M20X1.5	12	33,2	39,0	24,0
A55A57-04-06	TN	06	10,0	3/8"	M18X1.5	10	35,0	38,0	22,0
A55A57-05-06	SN	06	10,0	3/8"	M20X1.5	12	34,3	38,5	24,0
A55A57-06-06	SN	06	10,0	3/8"	M22X1.5	14	34,3	40,5	27,0
A55A57-05-08	TN	08	13,0	1/2"	M20X1.5	12	40,0	45,0	24,0
A55A57-08-08	SN	08	13,0	1/2"	M24X1.5	16	39,8	41,5	30,0
A55A57-10-08	SN	08	13,0	1/2"	M30X2	20	45,8	50,0	36,0
A55A57-08-10	TN	10	16,0	5/8"	M24X1.5	16	52,0	56,0	30,0
A55A57-10-10	SN	10	16,0	5/8"	M30X2	20	47,9	55,0	36,0
A55A57-10-12	SN	12	19,0	3/4"	M30X2	20	50,6	58,0	36,0
A55A57-12-12	SN	12	19,0	3/4"	M36X2	25	50,6	59,5	46,0
A55A57-12-16	SN	16	25,0	1"	M36X2	25	77,6	73,5	46,0
A55A57-16-16	SN	16	25,0	1"	M42X2	30	75,6	79,0	50,0
A55A57-16-20	TN	20	32,0	1 1/4"	M42X2	30	94,0	92,0	50,0
A55A57-20-20	SN	20	32,0	1 1/4"	M52X2	38	94,0	92,0	60,0

// A55145 - FEMMINA UNIVERSALE METRICA - DKL
// UNIVERSAL METRIC FEMALE - DKL

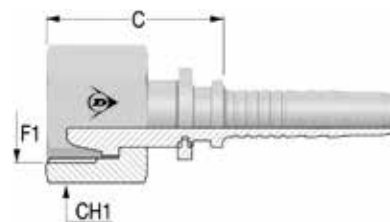

Code	Nut Type	ID			F1	F1	C	CH1
		Dash	mm	In	Dash Size		mm	mm
A55145-04-04	SN	04	6,0	1/4"	14	M14X1.5	22,3	17,0
A55145-05-04	SN	04	6,0	1/4"	16	M16X1.5	21,8	19,0
A55145-06-04	SN	04	6,0	1/4"	18	M18X1.5	22,3	22,0
A55145-05-05	SN	05	8,0	5/16"	16	M16X1.5	22,3	19,0
A55145-06-05	SN	05	8,0	5/16"	18	M18X1.5	22,3	22,0
A55145-06-06	SN	06	10,0	3/8"	18	M18X1.5	22,3	22,0
A55145-08-08	SN	08	13,0	1/2"	22	M22X1.5	24,7	27,0
A55145-10-10	SN	10	16,0	5/8"	26	M26X1.5	25,1	32,0


// A55985 - FEMMINA 45° UNIVERSALE - DKL
// 45° UNIVERSAL METRIC FEMALE - DKL

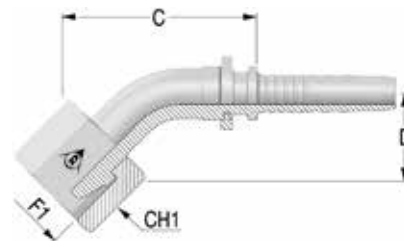

Code	Nut Type	ID			F1	F1	C	D Drop	CH1
		Dash	mm	In	Dash Size		mm	mm	mm
A55985-04-04	SN	04	6,0	1/4"	14	M14X1.5	36,5	16,0	17,0
A55985-05-05	SN	05	8,0	5/16"	16	M16X1.5	42,1	19,0	19,0
A55985-06-06	SN	06	10,0	3/8"	18	M18X1.5	42,8	20,0	22,0
A55985-08-08	SN	08	13,0	1/2"	22	M22X1.5	54,9	20,0	27,0
A55985-10-10	SN	10	16,0	5/8"	26	M26X1.5	54,0	22,0	32,0

// A55975 - FEMMINA 90° UNIVERSALE - DKL


// 90° UNIVERSAL METRIC FEMALE - DKL

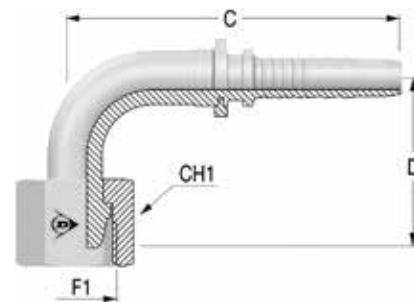


Code	Nut Type	ID			F1	F1	C	D Drop	CH1
		Dash	mm	In	Dash Size		mm	mm	mm
A55975-04-04	SN	04	6,0	1/4"	14	M14X1.5	29,9	28,5	17,0
A55975-05-04	SN	04	6,0	1/4"	16	M16X1.5	28,3	33,0	19,0
A55975-05-05	SN	05	8,0	5/16"	16	M16X1.5	34,2	36,0	19,0
A55975-06-05	SN	05	8,0	5/16"	18	M18X1.5	34,0	32,0	22,0
A55975-06-06	SN	06	10,0	3/8"	18	M18X1.5	32,8	37,0	22,0
A55975-08-06	SN	06	10,0	3/8"	22	M22X1.5	32,3	36,0	27,0
A55975-08-08	SN	08	13,0	1/2"	22	M22X1.5	39,8	40,0	27,0
A55975-10-10	SN	10	16,0	5/8"	26	M26X1.5	51,0	46,0	32,0

// 551800 - MASCHIO METRICO SV. 60° - CEM


// METRIC MALE 60° CONE - CEM

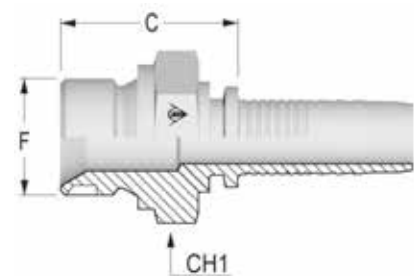

Code	ID			F1	F1
	Dash	mm	In	Dash size	
551800-03-03	03	5,0	3/16"	12	M12X1,5
551800-03-04	04	6,0	1/4"	12	M12X1,5
551800-04-04	04	6,0	1/4"	14	M14X1,5
551800-05-04	04	6,0	1/4"	16	M16X1,5
551800-05-05	05	8,0	5/16"	16	M16X1,5
551800-06-05	05	8,0	5/16"	18	M18X1,5
551800-04-06	06	10,0	3/8"	14	M14X1,5
551800-05-06	06	10,0	3/8"	16	M16X1,5
551800-06-06	06	10,0	3/8"	18	M18X1,5
551800-08-08	08	13,0	1/2"	22	M22X1,5
551800-10-10	10	16,0	1"	26	M26X1,5

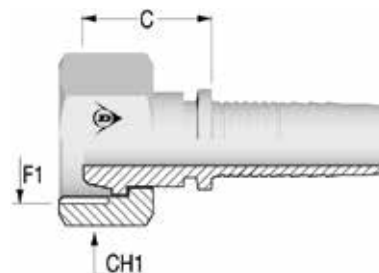
// A55140 - FEMMINA METRICA SV. 60° DIN 3863 - DKM
// METRIC FEMALE 60° CONE - DIN 3863 - DKM


Code	Nut Type	ID			F1	F1	C	CH1
		Dash	mm	In	Dash Size		mm	mm
A55140-02-03	SN	03	5,0	3/16"	10	M10X1	19,0	15
A55140-03-03	SN	03	5,0	3/16"	12	M12X1.5	19,0	17
A55140-03-04	SN	04	6,0	1/4"	12	M12X1.5	19,0	17
A55140-04-04	SN	04	6,0	1/4"	14	M14X1.5	18,0	17
A55140-05-04	SN	04	6,0	1/4"	16	M16X1.5	20,0	22
A55140-05-05	SN	05	8,0	5/16"	16	M16X1.5	20,0	22
A55140-06-05	SN	05	8,0	5/16"	18	M18X1.5	20,0	22
A55140-05-06	SN	06	10,0	3/8"	16	M16X1.5	20,0	22
A55140-06-06	SN	06	10,0	3/8"	18	M18X1.5	20,0	22
A55140-07-06	SN	06	10,0	3/8"	20	M20X1.5	22,0	27
A55140-08-06	SN	06	10,0	3/8"	22	M22X1.5	22,0	27
A55140-07-08	SN	08	13,0	1/2"	20	M20X1.5	23,0	27
A55140-08-08	SN	08	13,0	1/2"	22	M22X1.5	23,0	27
A55140-10-08	SN	08	13,0	1/2"	26	M26X1.5	25,0	32
A55140-10-10	SN	10	16,0	5/8"	26	M26X1.5	25,0	32
A55140-10-12	SN	12	19,0	3/4"	26	M26X1.5	26,0	32
A55140-12-12	SN	12	19,0	3/4"	30	M30X1.5	26,0	36
A55140-16-16	SN	16	25,0	1"	38	M38X1.5	30,0	46

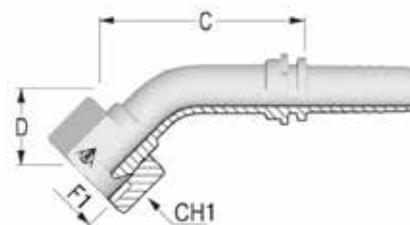// A55A41 - FEMMINA 45° METRICA SV. 60° DIN 3863 - DKM
// METRIC FEMALE 45° CONE - DIN 3863 - DKM



Code	Nut Type	ID			F1	F1	C	CH1
		Dash	mm	In	Dash Size		mm	mm
A55A41-04-04	SN	04	6,0	1/4"	14x1,5	36,0	14,0	17,0
A55A41-05-04	SN	04	6,0	1/4"	16x1,5	37,5	16,0	22,0
A55A41-06-04	SN	04	6,0	1/4"	18x1,5	37,5	16,0	22,0
A55A41-05-05	SN	05	8,0	5/16"	16x1,5	44,0	17,0	22,0
A55A41-06-05	SN	05	8,0	5/16"	18x1,5	44,0	17,0	22,0
A55A41-05-06	SN	06	10,0	3/8"	16x1,5	48,0	18,0	22,0
A55A41-06-06	SN	06	10,0	3/8"	18x1,5	48,0	20,0	22,0
A55A41-07-06	SN	06	10,0	3/8"	20x1,5	49,5	20,0	27,0
A55A41-08-06	SN	06	10,0	3/8"	22x1,5	49,5	20,0	27,0
A55A41-07-08	SN	08	13,0	1/2"	20x1,5	58,5	22,0	27,0
A55A41-08-08	SN	08	13,0	1/2"	22x1,5	58,5	22,0	27,0
A55A41-10-10	SN	10	16,0	5/8"	26x1,5	68,0	25,0	32,0
A55A41-10-12	SN	12	19,0	3/4"	26x1,5	68,0	28,0	32,0
A55A41-16-16	SN	16	25,0	1"	38x1,5	85,0	33,0	46,0
A55A41-20-20	SN	20	32,0	1 1/4"	45x1,5	85,0	40,0	50,0

// A55A40 - FEMMINA 90° METRICA SV. 60° DIN 3863 - DKM
// 90° METRIC FEMALE 60° CONE - DIN 3863 - DKM




Code	Nut Type	ID			F1	F1	C	D Drop	CH1
		Dash	mm	In	Dash Size		mm	mm	mm
A55A40-04-04	SN	04	6,0	1/4"	14	M14X1.5	23,0	26,0	17,0
A55A40-05-04	SN	04	6,0	1/4"	16	M16X1.5	23,0	28,0	22,0
A55A40-05-05	SN	05	8,0	5/16"	16	M16X1.5	29,0	32,5	22,0
A55A40-06-05	SN	05	8,0	5/16"	18	M18X1.5	29,0	32,5	22,0
A55A40-05-06	SN	06	10,0	3/8"	16	M16X1.5	33,0	35,5	22,0
A55A40-06-06	SN	06	10,0	3/8"	18	M18X1.5	33,0	35,5	22,0
A55A40-07-06	SN	06	10,0	3/8"	20	M20X1.5	33,0	37,5	27,0
A55A40-08-06	SN	06	10,0	3/8"	22	M22X1.5	33,0	37,5	27,0
A55A40-07-08	SN	08	13,0	1/2"	20	M20X1.5	39,5	43,0	27,0
A55A40-08-08	SN	08	13,0	1/2"	22	M22X1.5	39,5	43,0	27,0
A55A40-10-10	SN	10	16,0	5/8"	26	M26X1.5	47,5	51,0	32,0
A55A40-10-12	SN	12	19,0	3/4"	26	M26X1.5	55,5	57,0	32,0
A55A40-12-12	SN	12	19,0	3/4"	30	M30X1.5	60,0	60,0	32,0
A55A40-16-16	SN	16	25,0	1"	38	M38X1.5	68,0	69,0	46,0
A55A40-20-20	SN	20	32,0	1" 1/4	45	M45X1.5	68,0	85,0	50,0

// 550930 - 550940 - ESTREMITÀ TUBOLARE METRICA DIN 2353 - RSL/RSS
// METRIC STRAIGHT STANDPIPE - DIN 2353 - RSL/RSS




Code	ID			OD1	C
	Dash	mm	In	mm	mm
550940-02-03	03	5,0	3/16"	06S	27,8
550940-03-03	03	5,0	3/16"	08S	29,8
550930-03-04	04	6,0	1/4"	06L	28,3
550930-04-04	04	6,0	1/4"	08L	30,2
550940-04-04	04	6,0	1/4"	10S	32,2
550930-06-04	04	6,0	1/4"	12L	31,2
550930-04-05	05	8,0	5/16"	08L	30,3
550930-05-05	05	8,0	5/16"	10L	30,2
550940-05-05	05	8,0	5/16"	12S	32,7
550930-05-06	06	10,0	3/8"	10L	30,3
550930-06-06	06	10,0	3/8"	12L	29,3
550940-06-06	06	10,0	3/8"	14S	35,8
550930-08-06	06	10,0	3/8"	15L	34,8
550930-05-08	08	13,0	1/2"	10L	32,5
550930-06-08	08	13,0	1/2"	12L	32,1
550940-06-08	08	13,0	1/2"	14S	36,1
550930-08-08	08	13,0	1/2"	15L	32,1
550940-08-08	08	13,0	1/2"	16S	37,1
550930-10-08	08	13,0	1/2"	18L	36,0
550930-10-10	10	16,0	5/8"	18L	34,2
550940-10-10	10	16,0	5/8"	20S	44,2
550930-12-10	10	16,0	5/8"	22L	37,2
550940-10-12	12	19,0	3/4"	20S	45,5
550930-12-12	12	19,0	3/4"	22L	36,5
550940-12-12	12	19,0	3/4"	25S	48,5
550940-12-16	16	25,0	1"	25S	51,4
550930-16-16	16	25,0	1"	28L	40,4
550940-16-16	16	25,0	1"	30S	54,4
550940-20-16	16	25,0	1"	38S	60,4
550940-16-20	20	32,0	1 1/4"	30S	56,0
550930-20-20	20	32,0	1 1/4"	35L	48,0
550940-20-20	20	32,0	1 1/4"	38S	62,0
550940-20-24	24	38,0	1 1/2"	38S	62,0
550930-24-24	24	38,0	1 1/2"	42L	52,0

// 559490 - 559500- ESTREMITÀ TUBOLARE METRICA 45° DIN 2353 - RSL 45/RSS 45
// 45° METRIC STANDPIPE - DIN 2353 - RSL 45/RSS 45

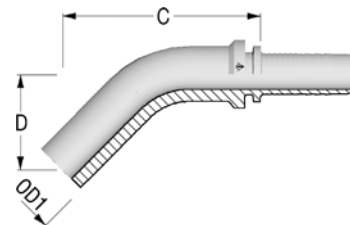


Code	ID			OD1	C	D Drop
	Dash	mm	In	mm	mm	mm
559490-03-04	04	6,0	1/4"	06L	50,1	28,0
559490-04-04	04	6,0	1/4"	08L	43,2	23,0
559500-04-04	04	6,0	1/4"	10S	48,0	24,0
559490-05-05	05	8,0	5/16"	10L	48,4	24,0
559500-05-05	05	8,0	5/16"	12S	49,0	24,0
559490-06-05	05	8,0	5/16"	12L	55,4	28,0
559490-05-06	06	10,0	3/8"	10L	48,5	24,0
559490-06-06	06	10,0	3/8"	12L	55,5	28,0
559500-06-06	06	10,0	3/8"	14S	53,1	28,0
559490-08-08	08	13,0	1/2"	15L	62,6	28,5
559500-08-08	08	13,0	1/2"	16S	63,3	32,0
559490-10-08	08	13,0	1/2"	18L	65,0	30,5
559490-10-10	10	16,0	5/8"	18L	65,0	30,5
559500-10-10	10	16,0	5/8"	18S	73,0	38,0
559500-12-10	10	16,0	5/8"	20S	89,2	35,0
559490-12-12	12	19,0	3/4"	22L	74,3	37,0
559500-12-12	12	19,0	3/4"	25S	83,0	44,0
559490-16-16	16	25,0	1"	28L	83,0	44,0
559500-16-16	16	25,0	1"	30S	137,0	46,1

// 559390- 559400 ESTREMITÀ TUBOLARE METRICA 90° DIN 2353 - RLS 90/RSS
 // 90° METRIC STANDPIPE - DIN 2353 - RLS 90/RSS



Code	ID			OD1	C	D Drop
	Dash	mm	In	mm	mm	mm
559400-02-03	03	5,0	3/16"	06S	24,5	36,0
559390-03-04	04	6,0	1/4"	06L	25,4	36,0
559390-04-04	04	6,0	1/4"	08L	25,9	44,0
559400-04-04	04	6,0	1/4"	10S	37,0	42,0
559390-06-04	04	6,0	1/4"	12L	38,0	50,0
559390-05-05	05	8,0	5/16"	10L	28,6	48,5
559400-05-05	05	8,0	5/16"	12S	39,4	55,0
559390-05-06	06	10,0	3/8"	10L	30,7	42,0
559390-06-06	06	10,0	3/8"	12L	35,0	50,0
559400-06-06	06	10,0	3/8"	14S	37,0	50,0
559390-06-08	08	13,0	1/2"	12L	41,1	52,0
559390-08-08	08	13,0	1/2"	15L	44,7	57,0
559400-08-08	08	13,0	1/2"	16S	43,7	64,0
559390-10-08	08	13,0	1/2"	18L	58,1	59,0
559390-10-10	10	16,0	5/8"	18L	52,2	58,0
559400-10-10	10	16,0	5/8"	20S	62,6	70,0
559390-12-10	10	16,0	5/8"	22L	49,4	64,0
559400-10-12	12	19,0	3/4"	20S	63,4	70,0
559390-12-12	12	19,0	3/4"	22L	53,1	67,5
559400-12-12	12	19,0	3/4"	25S	63,2	85,0
559400-12-16	16	25,0	1"	25S	73,1	98,5
559390-16-16	16	25,0	1"	28L	73,1	89,5
559400-16-16	16	25,0	1"	30S	73,1	102,5
559390-20-20	20	32,0	1 1/4"	35L	89,0	106,5


// 55A170 - OCCHIO METRICO - RNM
// METRIC BANJO - RNM

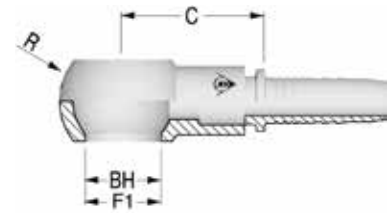

Code	ID			F1	C	BH	R
	Dash	mm	In				
55A170-03-03	03	5,0	3/16"	M10X1.0	24,0	10,00	17
55A170-03-04	04	6,0	1/4"	M10X1.0	25,0	10,00	17
55A170-04-04	04	6,0	1/4"	M12X1.5	28,5	12,00	20
55A170-05-04	04	6,0	1/4"	M14X1.5	27,5	14,00	24
55A170-04-05	05	8,0	5/16"	M12X1.5	28,5	12,00	24
55A170-05-05	05	8,0	5/16"	M14X1.5	27,5	14,00	24
55A170-06-05	05	8,0	5/16"	M16X1.5	30,5	16,00	28
55A170-08-05	05	8,0	5/16"	M18X1.5	28,5	18,00	32
55A170-05-06	06	10,0	3/8"	M14X1.5	27,5	14,00	24
55A170-06-06	06	10,0	3/8"	M16X1.5	30,5	16,00	28
55A170-08-06	06	10,0	3/8"	M18X1.5	31,5	18,00	32
55A170-08-08	08	13,0	1/2"	M18X1.5	32,0	18,00	32
55A170-12-08	08	13,0	1/2"	M22X1.5	35,0	22,00	39
55A170-12-10	10	16,0	5/8"	M22X1.5	35,0	22,00	39
55A170-20-12	12	19,0	3/4"	M26X1.5	38,5	26,00	46
55A170-24-16	16	25,0	1"	M30X1.5	42,5	30,00	54

// 003020 - VITE FORATA METRICA


// METRIC BOLT



Code	ID	F1	CH	LT	L
	Dash		mm	mm	mm
003020-03	10	M10X1.0	14,0	19,00	24,0
003020-04	12	M12X1.5	17,0	24,00	29,0
003020-05	14	M14X1.5	19,0	28,00	34,0
003020-06	16	M16X1.5	22,0	34,00	41,0
003020-08	18	M18X1.5	24,0	37,00	44,0
003020-10	20	M20X1.5	32,0	42,00	52,0
003020-12	22	M22X1.5	27,0	41,00	48,0
003020-20	26	M26X1.5	32,0	42,00	52,0
003020-24	30	M30X1.5	38,0	51,00	62,0

// DD3020 - VITE FORATA METRICA DOPPIA

// DUAL METRIC BOLT



Code	ID	F1	CH	LT	L
	Dash		mm	mm	mm
DD3020-03	10	10X1.0	14,0	33,00	38,0
DD3020-04	12	12X1.5	17,0	37,00	43,0
DD3020-05	14	14X1.5	19,0	43,00	49,0
DD3020-06	16	16X1.5	22,0	51,00	58,0
DD3020-08	18	18X1.5	24,0	57,00	65,0
DD3020-10	22	22X1.5	27,0	63,00	71,0