


// WATERBLAST - INSERTI INSERTS

// A99001 - FEMMINA BSPP SV. 60° CON O'RING


// BSPP FEMALE 60° WITH O'RING

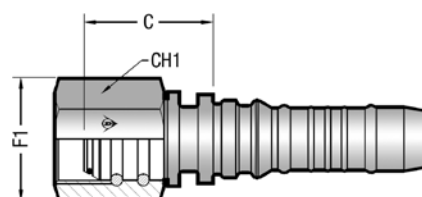

Code	Nut Type	ID			F1	F1	C	CH1
		Dash	mm	In	Dash Size		mm	mm
A99001-04-04	SN	04	6,0	1/4"	04	1/4-19	26,0	22,0
A99001-06-05	SN	05	8,0	5/16"	06	3/8-19	31,0	25,0
A99001-06-06	TN	06	10,0	3/8"	06	3/8-19	32,1	22,0
A99001-08-08	TN	08	13,0	1/2"	08	1/2-14	36,0	30,0


// A99002 - FEMMINA BSPP SV. 60° SENZA O'RING

// BSPP FEMALE 60° WITHOUT O'RING

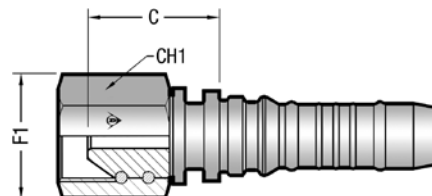


Code	Nut Type	ID			F1	F1	C	CH1
		Dash	mm	In	Dash Size		mm	mm
A99002-08-08	TN	08	13,0	1/2"	08	1/2-14	36,0	30,0

// A99179 - FEMMINA METRICA SV. 24° CON O'RING DIN 3865 SERIE PESANTE - DKOS - DADO A BATTUTA CON FORO DI SCARICO
// METRIC FEMALE 24° CONE WITH O'RING - HEAVY - DIN 3865 - DKOS - SLIP ON NUT WITH RELIEF BORE

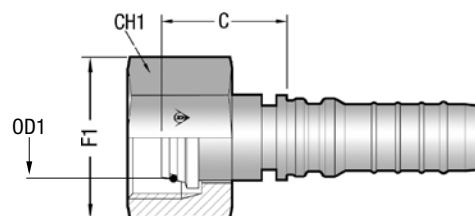

Code	Nut Type	ID			F1	OD1	C	CH1
		Dash	mm	In		mm	mm	mm
A99179-02-04	SN	04	6,0	1/4"	M14X1.5	6	28,0	22,0
A99179-04-05	SN	05	8,0	5/16"	M18X1.5	10	34,3	27,0
A99179-06-06	SN	06	10,0	3/8"	M22X1.5	14	36,5	27,0
A99179-08-06	SN	06	10,0	3/8"	M24X1.5	16	39,5	30,0
A99179-08-08	SN	08	13,0	1/2"	M24X1.5	16	40,0	30,0
A99179-12-12	SN	12	19,0	3/4"	M36X2	25	47,3	46,0
A99179-16-16	SN	16	25,0	1"	M42X2	30	49,6	50,0

// 990170 - MASCHIO NPTF SV. 60° - AGN
// NPTF MALE 60° SEAT - AGN

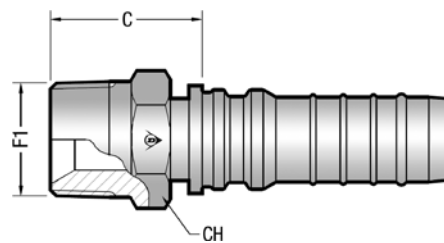

Code	Nut Type	ID			F1	F1	C	CH
		Dash	mm	In	Dash Size		mm	mm
990170-04-04	NA	04	6,0	1/4"	04	1/4-18	27,5	17,0
990170-06-05	NA	05	8,0	5/16"	06	3/8-18	30,5	19,0
990170-06-06	NA	06	10,0	3/8"	06	3/8-18	31,0	19,0
990170-08-08	NA	08	13,0	1/2"	08	1/2-14	35,0	22,0
990170-12-12	NA	12	19,0	3/4"	12	3/4-14	37,9	30,0
990170-16-16	NA	16	25,0	1"	16	1-11 1/2	47,3	36,0