


P CRIMP 140

ASSEMBLING FOR MASS PRODUCTION
STAND TYPE CRIMP MACHINE, SCS SYSTEM

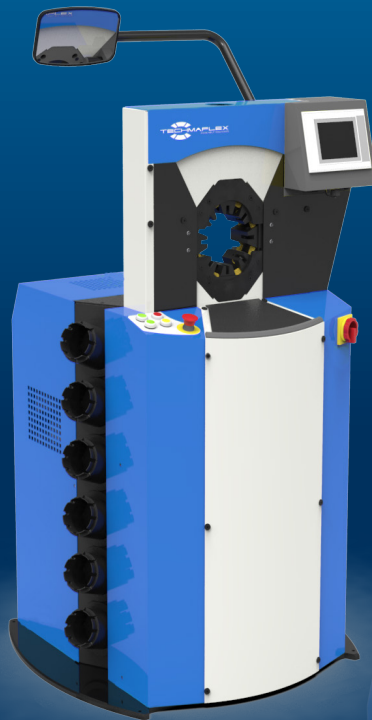

KEY FEATURES

- Safe Crimp System (SCS) control
- Large production capacity (small/medium bore)
- Low noise level
- Precise
- Robust
- Easy die set-up with ergonomic gun

TECHNICAL SPECIFICATIONS

CAPACITY*

2wb: 1¼" max.

4ws: 1¼" max.

CRIMP RANGE

4 - 70 mm (0.157 - 2.756")

CRIMP FORCE

140 t

OPENING WITH DIES

+45 mm (+1.772")

COMPLETE OPENING

125 mm (4.921")

MASTER DIE LENGTH

80 mm (3.150")

STANDARD DIES

15, 18, 21, 24, 27, 30, 33, 36,
39, 42, 45, 48

NOISE LEVEL

<69 dB A

MOTOR

5.5 kW

VOLTAGES

220/240 V, 3Ph, 50 Hz

380/415 V, 3Ph, 50 Hz

208/240 V, 3Ph, 60 Hz

DIMENSIONS

890 x 810 x 1390 mm

(35 x 32 x 55")

PACKAGING

1120 x 1020 x 1770 mm

(44 x 40 x 70")

NET WEIGHT

675 kg (1488 lb)


OPTIONAL



Aluminium Quick Change Gun



Electrical Footswitch



Mechanical Backstop



Mirror



Back View Camera

*Indicative capacities depending on hose and fitting type