


// INTERLOCK - INSERTI BSP *BSP INSERTS*

// 170120 - MASCHIO BSPP CILINDRICO SV. 60° - AGR


// BSPP MALE 60° FLARE - AGR

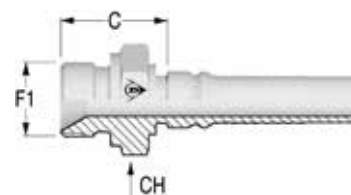

Code	Nut Type	ID			F1	F1	C	CH
		Dash	mm	In	Dash Size		mm	mm
170120-12-12	NA	12	19,0	3/4"	12	3/4-14	34,0	32,0
170120-16-16	NA	16	25,0	1"	16	1-11	40,0	41,0
170120-20-20	NA	20	32,0	1 1/4"	20	1 1/4-11	45,2	50,0
170120-24-24	NA	24	38,0	1 1/2"	24	1 1/2-11	48,5	55,0
170120-32-32	NA	32	51,0	2"	32	2-11	55,5	70,0

// 170130 - MASCHIO BSPT - AGR K


// BSPT MALE - AGR K

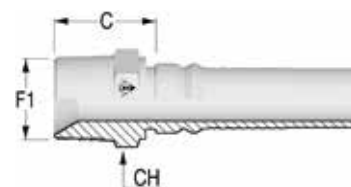

Code	Nut Type	ID			F1	F1	C	CH
		Dash	mm	In	Dash Size		mm	mm
170130-12-12	NA	12	19,0	3/4"	12	3/4-14	32,0	27,0
170130-16-16	NA	16	25,0	1"	16	1-11	42,0	36,0
170130-20-20	NA	20	32,0	1 1/4"	20	1 1/4-11	46,2	46,0
170130-24-24	NA	24	38,0	1 1/2"	24	1 1/2-11	48,0	50,0
170130-32-32	NA	32	51,0	2"	32	2-11	53,2	65,0

// A17001 - FEMMINA BSPP CILINDRICA SV. 60° CON O'RING - DKOR


// BSPP FEMALE 60° CONE WITH O'RING - DKOR

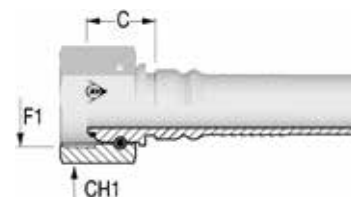

Code	Nut Type	ID			F1	F1	C	CH1
		Dash	mm	In	Dash Size		mm	mm
A17001-08-08	CR	08	13,0	1/2"	08	1/2-14	19,5	27,0
A17001-12-12	TN	12	19,0	3/4"	12	3/4-14	22,5	32,0
A17001-16-12	TN	12	19,0	3/4"	16	1-11	IN PREPARAZ.	38,0
A17001-16-16	TN	16	25,0	1"	16	1-11	25,5	38,0
A17001-20-16	TN	16	25,0	1"	20	1 1/4-11	IN PREPARAZ.	50,0
A17001-20-20	TN	20	32,0	1 1/4"	20	1 1/4-11	30,2	50,0
A17001-24-20	TN	20	32,0	1 1/4"	24	1 1/2-11	IN PREPARAZ.	55,0
A17001-24-24	TN	24	38,0	1 1/2"	24	1 1/2-11	33,5	55,0
A17001-32-32	TN	32	51,0	2"	32	2-11	35,0	70,0

// A17061 - FEMMINA 45° BSPP CILINDRICA SV. 60° CON O'RING - DKOR 45°


// 45° BSPP FEMALE 60° CONE WITH O'RING - DKOR 45

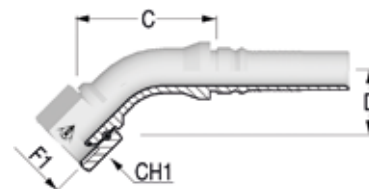

Code	Nut Type	ID			F1	F1	C	D Drop	CH1
		Dash	mm	In	Dash Size		mm	mm	mm
A17061-12-12	TN	12	19,0	3/4"	12	3/4-14	72,0	30,0	32,0
A17061-16-16	TN	16	25,0	1"	16	1-11	81,0	34,0	38,0
A17061-20-20	TN	20	32,0	1 1/4"	20	1 1/4-11	97,2	40,0	50,0
A17061-24-24	TN	24	38,0	1 1/2"	24	1 1/2-11	113,0	46,0	55,0
A17061-32-32	TN	32	51,0	2"	32	2-11	151,0	60,0	70,0

// A17051 - FEMMINA 90° BSPP CILINDRICA SV. 60° CON O'RING - DKOR 90°

// 90° BSPP FEMALE 60° CONE WITH O'RING - DKOR 90

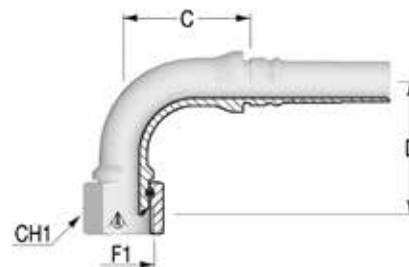

Code	Nut Type	ID			F1	F1	C	D Drop	CH1
		Dash	mm	In	Dash Size		mm	mm	mm
A17051-12-12	TN	12	19,0	3/4"	12	3/4-14	58,0	61,0	32,0
A17051-16-12	TN	12	19,0	3/4"	16	1-11	IN PREPARAZ.	IN PREPARAZ.	38,0
A17051-16-16	TN	16	25,0	1"	16	1-11	75,0	71,0	38,0
A17051-20-16	TN	16	25,0	1"	20	1 1/4-11	IN PREPARAZ.	IN PREPARAZ.	50,0
A17051-20-20	TN	20	32,0	1 1/4"	20	1 1/4-11	79,2	83,0	50,0
A17051-24-20	TN	20	32,0	1 1/4"	24	1 1/2-11	IN PREPARAZ.		55,0
A17051-24-24	TN	24	38,0	1 1/2"	24	1 1/2-11	93,5	96,0	55,0
A17051-32-32	TN	32	51,0	2"	32	2-11	134,0	125,0	70,0