



// INTERLOCK - INSERTI FLANGE SAE SAE FLANGES

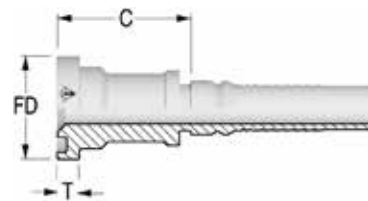

// 170250 - FLANGIA SAE 3000 PSI J518 CODE 61 - SFL

// FLANGE SAE 3000 PSI J518 CODE 61 - SFL


Code	ID			Flange		FD	T	C	WP
	Dash	mm	In	Dash Size	Flange Size				
170250-12-12	12	19	3/4"	12	3/4"	38,1	6,5	40,0	5000
170250-16-12	12	19	3/4"	16	1"	44,5	8,0	48,0	5000
170250-12-16	16	25	1"	12	3/4"	38,1	6,5	49,0	5000
170250-16-16	16	25,0	1"	16	1"	44,5	8,0	49,0	5000
170250-20-16	16	25,0	1"	20	1 1/4"	50,8	8,0	51,5	4000
170250-20-20	20	32,0	1 1/4"	20	1 1/4"	50,8	8,0	52,7	4000
170250-24-20	20	32,0	1 1/4"	24	1 1/2"	60,3	8,0	55,7	3000
170250-24-24	24	38,0	1 1/2"	24	1 1/2"	60,3	8,0	56,0	3000
170250-32-24	24	38,0	1 1/2"	32	2"	71,4	9,5	67,5	3000
170250-32-32	32	51,0	2"	32	2"	71,4	9,5	69,0	3000

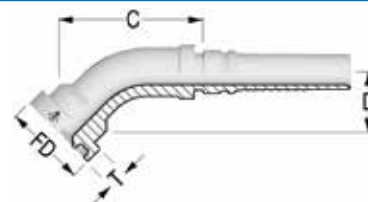

// 17B370 - FLANGIA 45° SAE 3000 PSI J518 CODE 61- SFL 45

// 45° FLANGE SAE 3000 PSI J518 CODE 61 - SFL 45

Code	ID			Flange		FD	T	C	D Drop	WP
	Dash	mm	In	Dash Size	Flange Size					
17B370-12-12	12	19	3/4"	12	3/4"	38,1	6,5	69,0	25,0	5000
17B370-16-12	12	19	3/4"	16	1"	44,5	8,0	93,0	28,0	5000
17B370-12-16	16	25	1"	12	3/4"	38,1	6,5	IN PREPARAZIONE	IN PREPARAZIONE	IN PREPARAZIONE
17B370-16-16	16	25	1"	16	1"	44,5	8,0	83,0	35,0	5000
17B370-20-16	16	25,0	1"	20	1 1/4"	50,8	8,0	95,6	30,0	4000
17B370-20-20	20	32,0	1 1/4"	20	1 1/4"	50,8	8,0	100,9	32,5	4000
17B370-24-20	20	32,0	1 1/4"	24	1 1/2"	60,3	8,0	92,8	40,0	3000
17B370-24-24	24	38,0	1 1/2"	24	1 1/2"	60,3	9,5	103,7	43,0	3000
17B370-32-24	24	38,0	1 1/2"	32	2"	71,4	9,5	132,7	56,5	3000
17B370-32-32	32	51,0	2"	32	2"	71,4	9,5	138,1	54,0	3000

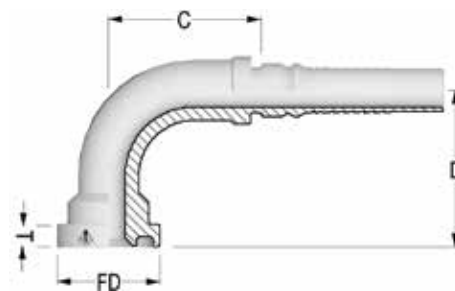


// 17B380 - FLANGIA 90° SAE 3000 PSI J518 CODE 61 - SFL 90

// 90° FLANGE SAE 3000 PSI J518 CODE 61 - SFL 90


Code	ID			Flange		FD	T	C	D Drop	WP
	Dash	mm	In	Dash Size	Flange Size					
17B380-08-12	12	19	3/4"	8	1/2"	30,2	6,5	49,0	42,0	5000
17B380-12-12	12	19	3/4"	12	3/4"	38,1	6,5	63,0	55,0	5000
17B380-16-12	12	19	3/4"	16	1"	44,5	8,0	64,0	59,0	5000
17B380-12-16	16	25	1"	12	3/4"	38,1	6,5	70,0	55,0	5000
17B380-16-16	16	25,0	1"	16	1"	44,5	8,0	72,2	64,0	5000
17B380-20-16	16	25,0	1"	20	1 1/4"	50,8	8,0	70,2	69,0	4000
17B380-20-20	20	32,0	1 1/4"	20	1 1/4"	50,8	8,0	86,2	81,0	4000
17B380-24-20	20	32,0	1 1/4"	24	1 1/2"	60,3	8,0	81,2	85,0	3000
17B380-24-24	24	38,0	1 1/2"	24	1 1/2"	60,3	8,0	95,5	93,0	3000
17B380-32-24	24	38,0	1 1/2"	32	2"	71,4	9,5	130,3	97,0	3000
17B380-32-32	32	51,0	2"	32	2"	71,4	9,5	134,4	130,0	3000

// 17B810 - FLANGIA SAE 6000 PSI J518 CODE 62 - SFS
// FLANGE SAE 6000 PSI J518 CODE 62 - SFS

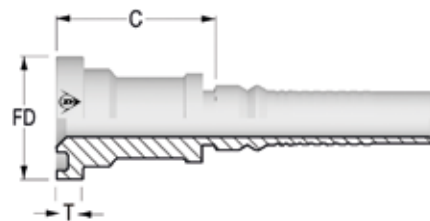

Code	ID			Flange	Flange Size	FD	T	C	WP
	Dash	mm	In	Dash Size		mm	mm	mm	psi
17B810-12-12	12	19,0	3/4"	12	3/4	41,3	9,0	50,0	6000
17B810-16-12	12	19,0	3/4"	16	1	47,6	9,5	53,0	6000
17B810-12-16	16	25,0	1"	12	3/4	41,3	9,0	51,0	6000
17B810-16-16	16	25,0	1"	16	1	47,6	9,5	54,0	6000
17B810-20-16	16	25,0	1"	20	1 1/4	54,0	10,5	61,0	6000
17B810-16-20	20	32,0	1 1/4"	16	1	47,6	9,5	80,2	6000
17B810-20-20-87	20	32,0	1 1/4"	20	1 1/4	54,0	10,5	87,1	6000
17B810-20-20-79	20	32,0	1 1/4"	20	1 1/4	54,0	10,5	79,2	6000
17B810-20-20	20	32,0	1 1/4"	20	1 1/4	54,0	10,5	62,2	6000
17B810-24-20	20	32,0	1 1/4"	24	1 1/2	63,5	12,5	68,2	6000
17B810-20-24	24	38,0	1 1/2"	20	1 1/4	54,0	10,5	62,5	6000
17B810-24-24-104	24	38,0	1 1/2"	24	1 1/2	63,5	12,5	104,5	6000
17B810-24-24	24	38,0	1 1/2"	24	1 1/2	63,5	12,5	68,5	6000
17B810-32-24	24	38,0	2"	32	2	79,4	12,5	80,5	6000
17B810-32-24-88	24	38,0	2"	32	2	79,4	12,5	88,0	6000
17B810-32-32	32	51,0	2"	32	2	79,4	12,5	87,0	6000
17B810-32-32-104	32	51,0	2"	32	2	79,4	12,5	104,0	6000


// 17B470 - FLANGIA 45° SAE 6000 PSI J518 CODE 62 - SFS 45
// 45° FLANGE SAE 6000 PSI J518 CODE 62 - SFS 45

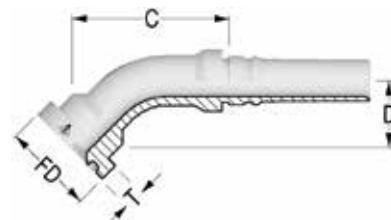

Code	ID			Flange	Flange Size	FD	T	C	D Drop	WP
	Dash	mm	In	Dash Size		mm	mm	mm	mm	psi
17B470-12-12	12	19,0	3/4"	12	3/4	41,3	9,0	72,1	30,0	6000
17B470-16-12	12	19,0	3/4"	16	1	47,6	9,5	76,8	33,0	6000
17B470-12-16	16	25,0	1"	12	3/4	41,3	9,0	80,3	29,5	6000
17B470-16-16	16	25,0	1"	16	1	47,6	9,5	94,8	35,0	6000
17B470-20-16	16	25,0	1"	20	1 1/4	54,0	10,5	105,3	44,0	6000
17B470-16-20	20	32,0	1 1/4"	16	1	47,6	9,5	104,7	34,5	6000
17B470-20-20	20	32,0	1 1/4"	20	1 1/4	54,0	10,5	102,0	39,5	6000
17B470-24-20	20	32,0	1 1/4"	24	1 1/2	63,5	12,5	111,7	48,0	6000
17B470-24-24	24	38,0	1 1/2"	24	1 1/2	63,5	12,5	136,3	48,0	6000
17B470-32-24	24	38,0	1 1/2"	32	2	79,4	12,5	129,1	55,0	6000
17B470-32-32	32	51,0	2"	32	2	79,4	12,5	160,6	63,0	6000


// 17B480 - FLANGIA 90° SAE 6000 PSI J518 CODE 62 - SFS 90

// 90° FLANGE SAE 6000 PSI J518 CODE 62 - SFS 90

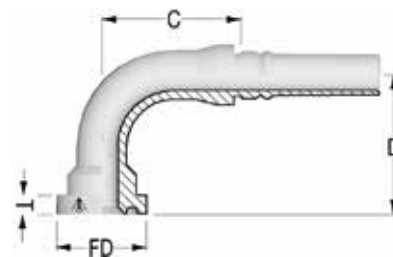


Code	ID			Flange	Flange Size	FD	T	C	D Drop	WP
	Dash	mm	In	Dash Size		mm	mm	mm	mm	psi
17B480-12-12	12	19,0	3/4"	12	3/4	41,3	9,0	61,2	64,0	6000
17B480-16-12	12	19,0	3/4"	16	1	47,6	9,5	61,2	66,0	6000
17B480-12-16	16	25,0	1"	12	3/4	41,3	9,0	70,2	61,0	6000
17B480-16-16	16	25,0	1"	16	1	47,6	9,5	70,4	74,0	6000
17B480-20-16	16	25,0	1"	20	1 1/4	54,0	10,5	77,2	80,0	6000
17B480-20-20	20	32,0	1 1/4"	20	1 1/4	54,0	12,5	88,2	91,0	6000
17B480-24-20	20	32,0	1 1/4"	24	1 1/2	63,5	12,5	92,9	103,5	6000
17B480-24-24	24	38,0	1 1/2"	24	1 1/2	63,5	12,5	106,3	109,0	6000
17B480-32-24	24	38,0	1 1/2"	32	2	79,4	12,5	106,5	121,5	6000
17B480-32-32	32	51,0	2"	32	2	79,4	12,5	146,0	138,5	6000

// 18B810 - FLANGIA SAE 6000 PSI J518 CODE 62 - SFS - VERSIONE SPECIALE
// FLANGE SAE 6000 PSI J518 CODE 62 - SFS - SPECIAL VERSION

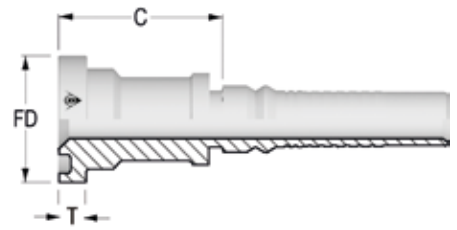


Code	ID			Flange	Flange Size	FD	T	C	WP
	Dash	mm	In	Dash Size		mm	mm	mm	psi
18B810-24-32	32	51,0	2"	24	1 1/2	63,5	12,5	106,0	6000
18B810-32-32	32	51,0	2"	32	2	79,4	12,5	104,0	6000
18B810-40-40	40	63,0	2 1/2"	40	2 1/2	108,0	12,5	124,3	6000

// 18B470 - FLANGIA 45° SAE 6000 PSI J518 CODE 62 - SFS 45 - VERSIONE SPECIALE
// 45° FLANGE SAE 6000 PSI J518 CODE 62 - SFS 45 - SPECIAL VERSION

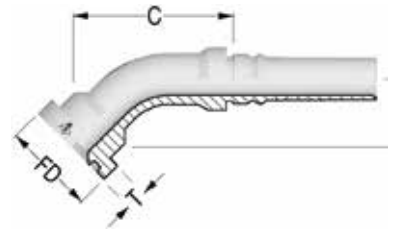

Code	ID			Flange	Flange Size	FD	T	C	D Drop	WP
	Dash	mm	In	Dash Size		mm	mm	mm	mm	psi
18B470-32-32	32	51,0	2"	32	2	79,4	12,5	141,0	63,0	6000

// 18B480 - FLANGIA 90° SAE 6000 PSI J518 CODE 62 - SFS 90 - VERSIONE SPECIALE
// 90° FLANGE SAE 6000 PSI J518 CODE 62 - SFS 90 - SPECIAL VERSION

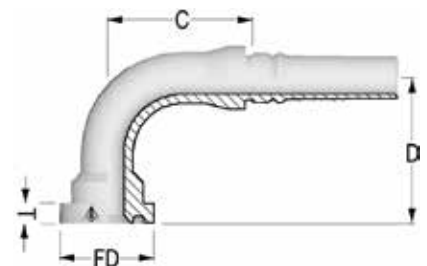

Code	ID			Flange	Flange Size	FD	T	C	D Drop	WP
	Dash	mm	In	Dash Size		mm	mm	mm	mm	psi
18B480-24-32	32	51,0	2"	24	1 1/2	63,5	12,5	134,0	112,0	6000
18B480-32-32	32	51,0	2"	32	2	79,4	12,5	132,0	145,0	6000