


// INTERLOCK - INSERTI METRICI DIN DIN METRIC INSERTS

// 171700 - MASCHIO METRICO SV. 24° DIN 3853 SERIE PESANTE - CES


// METRIC MALE 24° SEAT - HEAVY - DIN 3853 - CES

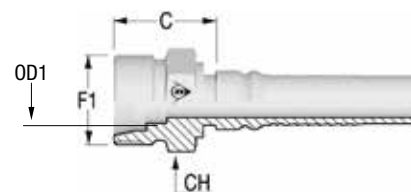

Code	Nut Type	ID			F1	OD1	C	CH
		Dash	mm	In		mm	mm	mm
171700-08-08	NA	08	13,0	1/2"	M24X1.5	16	27,0	24,0
171700-10-10	NA	10	16,0	5/8"	M30X2	20	31,0	32,0
171700-12-12	NA	12	19,0	3/4"	M36X2	25	35,0	36,0
171700-16-16	NA	16	25,0	1"	M42X2	30	40,0	46,0
171700-20-20	NA	20	32,0	1 1/4"	M52X2	38	45,2	55,0

// A17179 - FEMMINA METRICA SV. 24° CON O'RING DIN 3865 SERIE PESANTE - DKOS


// METRIC FEMALE 24° CONE WITH O'RING - HEAVY - DIN 3865 - DKOS

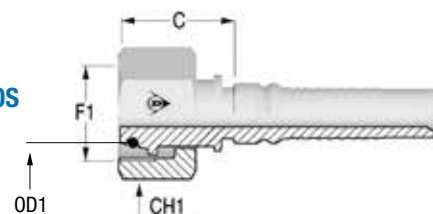

Code	Nut Type	ID			F1	OD1	C	CH1
		Dash	mm	In		mm	mm	mm
A17179-08-08	SN	08	13,0	1/2"	M24X1.5	16	29,6	30,0
A17179-10-10	SN	10	16,0	5/8"	M30X2	20	34,4	36,0
A17179-10-12	TN	12	19,0	3/4"	M30X2	20	37,5	36,0
A17179-12-12	SN	12	19,0	3/4"	M36X2	25	37,6	46,0
A17179-12-16	TN	16	25,0	1"	M36X2	25	38,8	46,0
A17179-16-16	SN	16	25,0	1"	M42X2	30	40,7	50,0
A17179-16-20	TN	20	32,0	1 1/4"	M42X2	30	43,6	50,0
A17179-20-20	SN	20	32,0	1 1/4"	M52X2	38	45,3	60,0
A17179-20-24	TN	24	38,0	1 1/2"	M52X2	38	50,8	60,0

// A17987 - FEMMINA 45° METRICA SV. 24° CON O'RING DIN 3865 SERIE PESANTE - DKOS 45


// 45° METRIC FEMALE 24° CONE WITH O'RING - HEAVY - DIN 3865 - DKOS 45

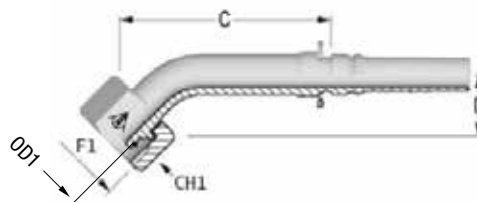

Code	Nut Type	ID			F1	OD1	C	D Drop	CH1
		Dash	mm	In		mm	mm	mm	mm
A17987-08-08	SN	08	13,0	1/2"	M24X1.5	16	83,0	29,0	30,0
A17987-10-10	SN	10	16,0	5/8"	M30X2	20	59,0	31,5	36,0
A17987-10-12	TN	12	19,0	3/4"	M30X2	20	74,0	33,0	36,0
A17987-12-12	SN	12	19,0	3/4"	M36X2	25	78,1	36,0	46,0
A17987-12-16	TN	16	25,0	1"	M36X2	25	86,5	37,5	46,0
A17987-16-16	SN	16	25,0	1"	M42X2	30	96,8	38,0	50,0
A17987-20-20	SN	20	32,0	1 1/4"	M52X2	38	112,7	48,0	60,0
A17987-20-24	TN	24	38,0	1 1/2"	M52X2	38	111,0	44,0	60,0

// A17977 - FEMMINA 90° METRICA SV. 24° CON O'RING DIN 3865 SERIE PESANTE - DKOS 90

// 90° METRIC FEMALE 24° CONE WITH O'RING - HEAVY - DIN 3865 - DKOS 90

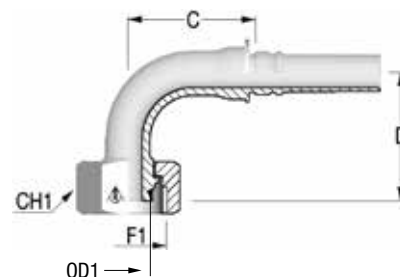

Code	Nut Type	ID			F1	OD1	C	D Drop	CH1
		Dash	mm	In		mm	mm	mm	mm
A17977-08-08	SN	08	13,0	1/2"	M24X1.5	16	52,0	50,0	30,0
A17977-10-10	SN	10	16,0	5/8"	M30X2	20	48,0	55,0	36,0
A17977-10-12	TN	12	19,0	3/4"	M30X2	20	61,0	67,5	36,0
A17977-12-12	SN	12	19,0	3/4"	M36X2	25	61,7	65,0	46,0
A17977-12-16	TN	16	25,0	1"	M36X2	25	76,5	76,5	46,0
A17977-16-16	SN	16	25,0	1"	M42X2	30	86,4	79,0	50,0
A17977-20-20	SN	20	32,0	1 1/4"	M52X2	38	90,9	101,0	60,0
A17977-20-24	TN	24	38,0	1 1/2"	M52X2	38	100,5	102,0	60,0